



Ceiling cut out template – recessed installation

Type	Diameter 'H' (mm)	Hole cut-out 'D' (mm)
Without Ring	60	52
Small Ring (included)	80	66
Medium Ring (included)	120	72
Square Ring	103 x 103	72
Large Ring (included)	150	72

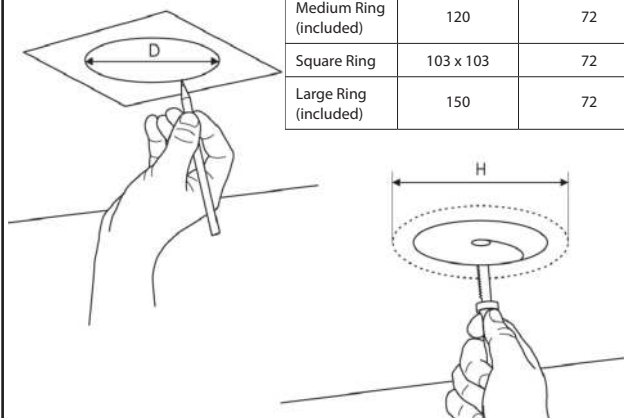


Mains supply connection – recessed installation


Supplied complete with flex and plug.

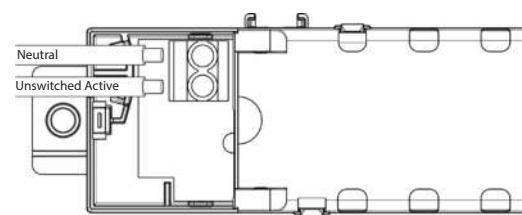


For DALI models, hard wiring is required.

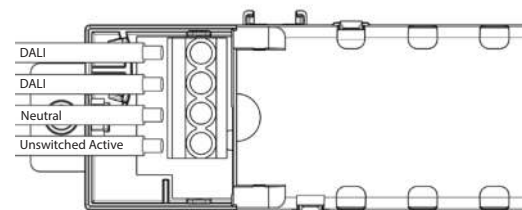


Recessed installation

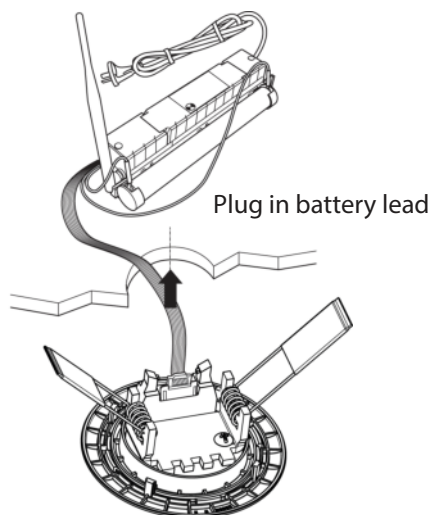

Changing trim size for non corridor models

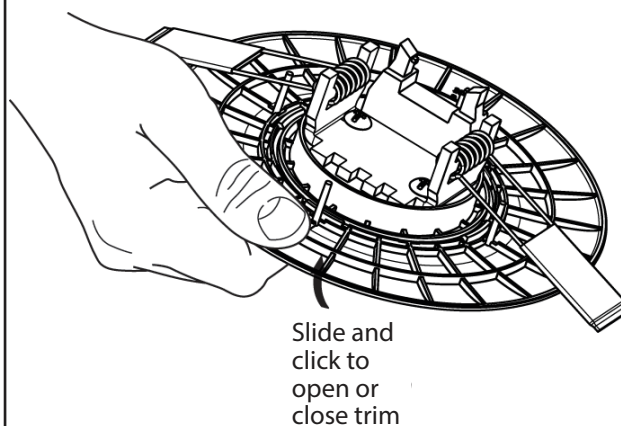


Changing trim size for corridor models with square trim

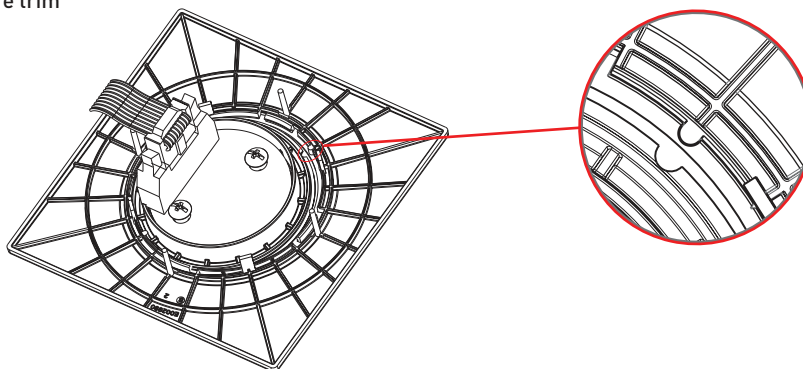

Ensure locators are in position prior to securing the square trim.



Corridor Satellite installation

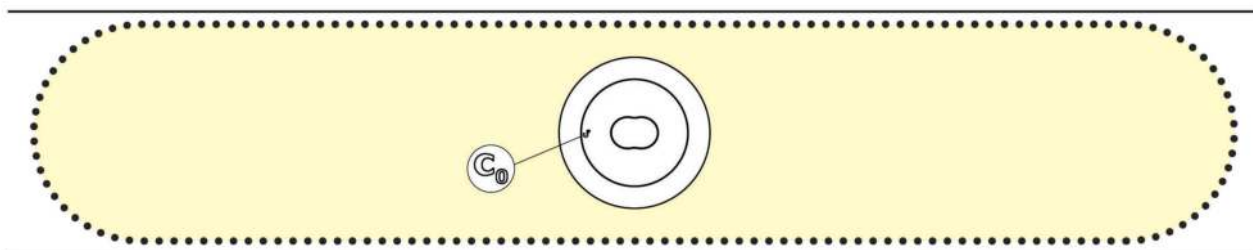

NOTE: Ensure the "C" symbol is parallel to the wall



Minimum ceiling void

NO INSULATION

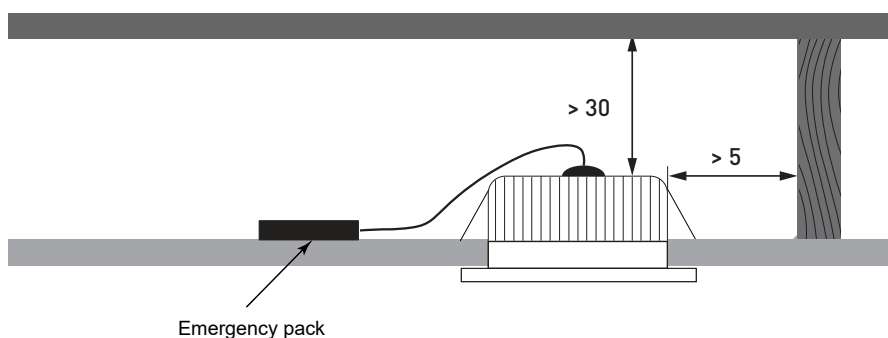


Note: Ensure emergency pack is above insulation

Surface mount installation – Direct onto the ceiling using mounting holes shown below

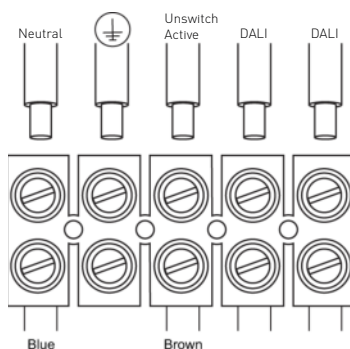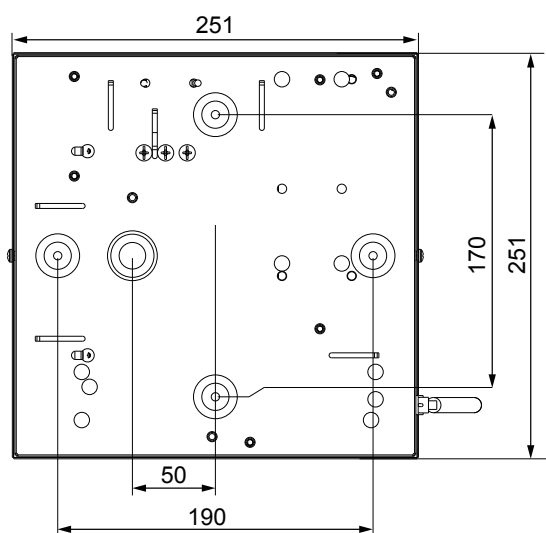

DALI terminal connection is applicable to DALI models only.

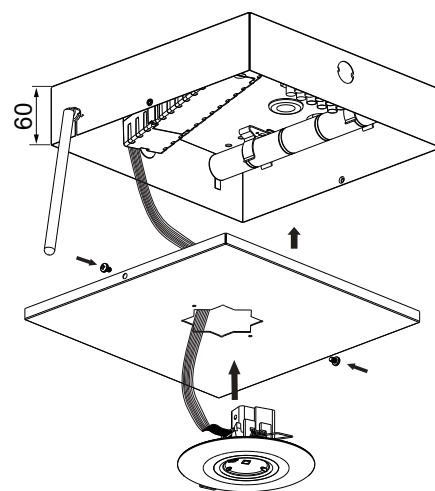

*All dimensions are in millimeter.