Datasheet

Weatherproof LED Exit Sign - IP65

CAT NO. **684650/LI, 684651/LI, 684652/LI, 684654/LI, 684655/LI, 684656/LI, 684657/LI, 684660/LI, 684661/LI, 684662/LI, 684664/LI, 684665/LI, 684666/LI, 684667/LI, 684670/LI, 684671/LI, 684672/LI, 684674/LI, 684681/LI, 684682/LI, 684684/LI, 684685/LI, 684686/LI, 684687/LI**





Mode of operation	Maintained
Supply voltage	240V a.c. (+/- 6%) 50 Hz
Power consumption	5.4W
Batteries	Li-ion 6.4V 1.5Ah
Body construction	Polycarbonate
Diffuser	Polycarbonate
Operating temperature	10°C to 40°C
IP rating	IP65
Impact rating	IK-08
Compliance	AS/NZS 2293 AS/NZS 60598

Datasheet

Weatherproof LED Exit Sign - IP65

CAT NO. **684650/LI, 684651/LI, 684652/LI, 684654/LI, 684655/LI, 684656/LI, 684657/LI, 684660/LI, 684661/LI, 684662/LI, 684664/LI, 684665/LI, 684666/LI, 684667/LI, 684670/LI, 684671/LI, 684672/LI, 684674/LI, 684681/LI, 684682/LI, 684684/LI, 684685/LI, 684686/LI, 684687/LI**

Catalogue Numbers	Description
24m	
684650/LI	WP LED Exit RM
684651/LI	WP LED Exit RML
684652/LI	WP LED Exit RMR
684654/LI	WP LED Exit 'EXIT'
684655/LI	WP LED Exit 'EXIT' left
684656/LI	WP LED Exit 'EXIT' right
684657/LI	WP LED Exit 'EXIT' left/right
684660/LI	Axiom WP LED Exit RM
684661/LI	Axiom WP LED Exit RML
684662/LI	Axiom WP LED Exit RMR
684664/LI	Axiom WP LED Exit 'EXIT'
684665/LI	Axiom WP LED Exit 'Exit' left
684666/LI	Axiom WP LED Exit 'Exit' right
684667/LI	Axiom WP LED Exit 'Exit" left/right
32m	
684670/LI	WP LED Exit RM
684671/LI	WP LED Exit lrg RML
684672/LI	WP LED Exit RMR
684674/LI	WP LED Exit 'EXIT'
684680/LI	Axiom WP LED Exit RM
684681/LI	Axiom WP LED Exit RML
684682/LI	Axiom WP LED Exit RMR
684684/LI	Axiom WP LED Exit 'EXIT'
684685/LI	Axiom WP LED Exit 'Exit' left
684686/LI	Axiom WP LED Exit 'Exit' right
684687/LI	Axiom WP LED Exit 'Exit' left/right

RM = Running man straight, RML = Running man left, RMR = Running man right

Accessories	
684690	Wall bracket for 24m
684691	Side bracket for 24m
684692	Ceiling bracket for 24m

- iSmart™ temperature sensing technology for the LIION battery
- Electronics designed to lengthen the life of the battery, minimising maintenance costs
- Environmentally friendly battery
- Two sizes: 24m and 32m viewing distance
- High resistance polycarbonate ABS clear cover
- Removable gear tray for ease of maintenance and installation
- Large terminal block for ease of connection
- Low cost maintenance
- Designed and manufactured in Australia
- 5 year warranty

Classification	
24m	C0: E2.5 C90:E2
32m	C0: E2.5 C90:E2

Maximum spacing between luminaires for 0.2 lux

Mounting height (meters) / Classification	2.4	2.7	3.0	3.3
E 2.5	5.8	5.8	6.0	5.8
E 2	5.2	5.4	5.2	5.0

Maximum spacing between luminaires for 1 lux


Mounting height (meters) / Classification	2.4	2.7	3.0	3.3
E 2.5	N/A	N/A	N/A	N/A
E 2	N/A	N/A	N/A	N/A

Datasheet


Weatherproof LED Exit Sign - IP65

CAT NO. **684650/LI, 684651/LI, 684652/LI, 684654/LI, 684655/LI, 684656/LI, 684657/LI, 684660/LI, 684661/LI, 684662/LI, 684664/LI, 684665/LI, 684666/LI, 684667/LI, 684670/LI, 684671/LI, 684672/LI, 684674/LI, 684681/LI, 684682/LI, 684684/LI, 684685/LI, 684686/LI, 684687/LI**

DIMENSIONS

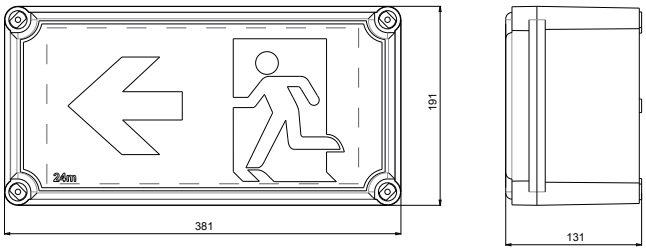


24m Exit

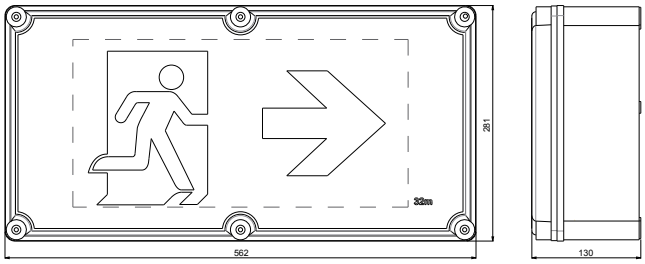


32m Exit


Rear mounting bracket

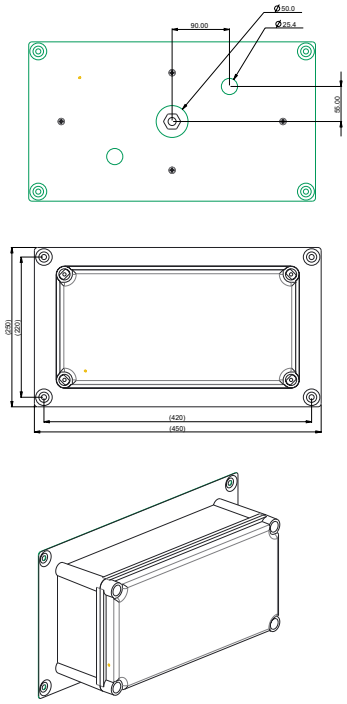

Side mounting bracket

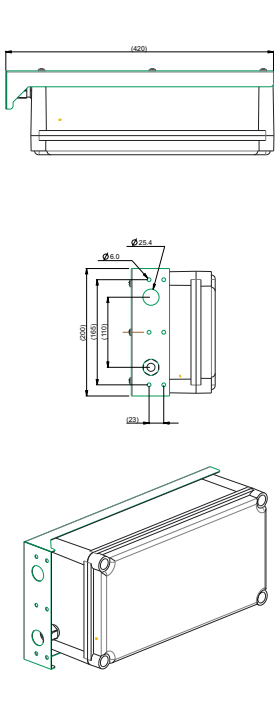

Ceiling mounting bracket

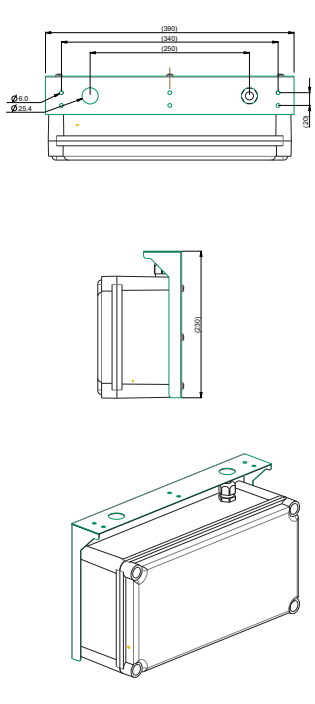

Legrand Australia
1300 369 777
www.legrand.com.au
ABN 31 000 102 661

Legrand New Zealand
0800 476 009
www.legrand.co.nz

Refer to your group buying office, Legrand Sales Representative or Legrand Sales Office for pricing.

Please note: specifications are subject to change without prior notice.

LEG2172

06_2018