

COSMIC ASYMMETRIC IP65 LED FLOOD

50W

90W

125W

170W

300W








PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Black powder-coated die cast Aluminium housing
- Tempered glass diffuser
- Stainless Steel bracket and screws
- Prewired with 1m of rubber flex

FEATURES


- 45° x 150° Asymmetric beam angle providing optimized light distribution for area lighting
- Equipped with self-regulating valve to prevent condensation
- Die cast Aluminium housing providing optimal heat dissipation and high resistance to weather conditions
- Pre-drilled mounting bracket with 180° adjustable angle
- Spigot accessory available for 300w fitting




	RCM5040AS-04	RCM9040AS-04	RCM12540AS-04	RCM17030AS-04	RCM30040AS-04
Comparable to:	350W Halogen 80W Metal Halide	800W Halogen 150W Metal Halide	1200W Halogen 250W Metal Halide	2000W Halogen 500W Metal Halide	3000W Halogen 600W Metal Halide
Total Power (W):	51.6	88.8	130.0	166.6	289.9
Power Factor:	0.95	0.95	0.95	0.95	0.95
Total Light Output (lm):	5740	10960	17370	21310	39200
Total Emergency Light Output (lm):	NA	NA	NA	NA	NA
Efficacy (lm/cctW):	111	123	134	128	135
Lux at 1m (lux):	2030	3750	6430	7280	16450
CCT (K):	4000	4000	4000	4000	4000
IP:	65	65	65	65	65
Operation Temperature (°C):	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40	-20 ≤ Ta ≤ +40
Inrush Current:	15A/150us	0.7A/0.1us	1.4A/0.1us	20A/150us	0.94A/11.3ns
RG Value:	0	0	0	0	0
Rated Life to L70B50 (Hrs):	50000	50000	50000	50000	50000
Dimensions LxWxH (mm):	262x277.5x41.5	304x383.5x57.5	418x487.5x59.5	418x487.5x59.5	444x582x60
Weight (kg):	1.6	3.6	6.0	6.1	11.5

Product is certified to all the relevant standards.


Please contact our technical department for market specific compliances.




RCM5040AS-04



RCM9040AS-04



RCM12540AS-04
RCM17040AS-04



RCM30040AS-04

ACCESSORIES:

RCMS-04 300W Spigot Accessory



PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000
UK: TEL: 0800 973 220
AUS: TEL: +61 7 3890 5444
NZ: TEL: +64 03 668 5285

WEB: ROBUS.COM
WEB: ROBUS.COM
WEB: ROBUS.COM.AU
WEB: ROBUSLED.CO.NZ

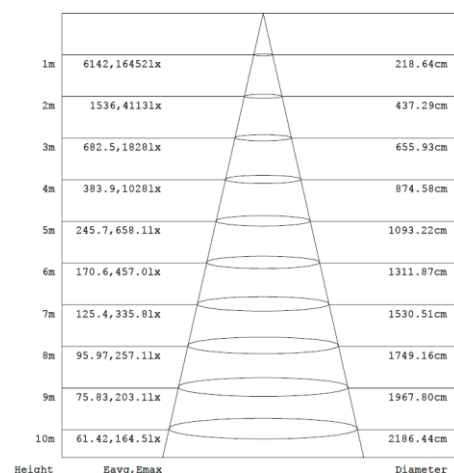


Diagram for RCM30040AS-04 in 4000K. Other diagrams available on