

ROBUS®

EMERGENCY

DYNAMO EMERGENCY DOWNLIGHT

2W, IP20






PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- White finish Polycarbonate/Aluminium Housing & Trim
- Spring steel ceiling retaining clips
- 85mm wide, additional 145mm extension trim also supplied

FEATURES


- Non-maintained emergency lighting is designed to turn on in the event of a power failure
- The fitting is prewired with 0.6m flex & plug
- A slim bezel provides a neat flush to the ceiling, attractive aesthetic
- D40 Classification
- Comes with LiFePO4 battery
- Can be surface mounted with RDYS-01 accessory
- Complies with AS/NZS 2293.3 standards



	RDY2NMEMENT-01
Comparable to:	NA
Total Power (W):	2.1
Total Emergency Light Output (lm):	240
Emergency Lux at 1m (lux):	60
CCT (K):	5700
CRI:	70
IP:	20
Operation Temperature (°C):	0 ≤ Ta ≤ +40
Inrush Current:	27A/1ms
RG Value:	0
L70B50 or the variant:	30000
Dimensions ØxH (mm):	85-145x38
Cut out (mm):	76-125
Weight (kg):	0.5


Product is certified to all the relevant standards.

Please contact our technical department for market specific compliances.

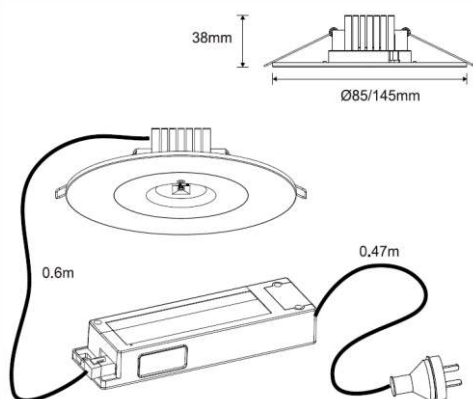

ACCESSORIES

RDYS-01 DYNAMO Surface Mount Box Accessory.

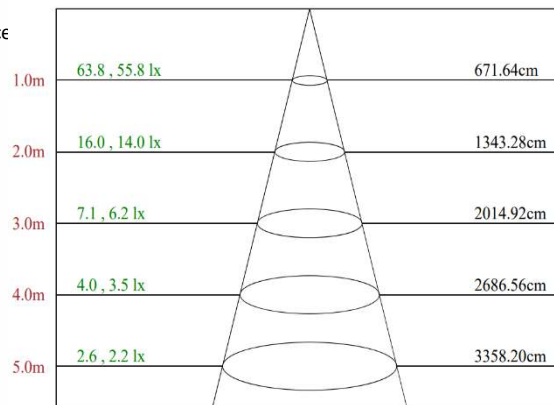

Max, Ave

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

Diagram for RDY2NMEMENT-01. Other diagrams available on request

IRE: TEL: +353 1 709 9000
 UK: TEL: 0800 973 220
 AUS: TEL: +61 7 3890 5444
 NZ: TEL: +64 03 668 5285

WEB: WWW.ROBUS.COM
 WEB: WWW.ROBUS.COM
 WEB: WWW.ROBUS.COM.AU
 WEB: WWW.ROBUSLED.CO.NZ

LED GROUP EUROPE · AUSTRALIA · NEW ZEALAND · ASIA · MIDDLE EAST · AFRICA