



Installation diagram

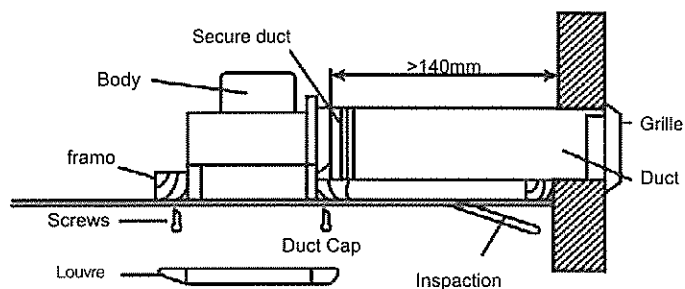


Body enclosure installation (with ceiling joist)


- (1) Construct the wood frame and attach it to the ceiling joist

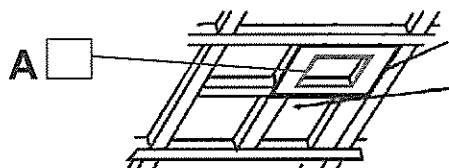

- (2) insert the body enclosure into the wood frame and secure with tapping screws (4Pcs).

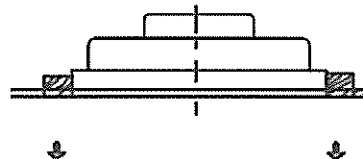

- (3) Switch power on and check operation, compress the springs of the louver and insert them into the long holes to secure the louver.



Model	A □
FAN2464	280
FAN2465	310

NOTE:

The distance between fan and building floor should be more than 2.3 metres.
There should be 100mm clearance around all sides and the top of the unit.

MAINTENANCE


WARNING:

Disconnect power source before working on the unit, routine maintenance must be done every year.


CAUTION!

1. Never use petrol, benzene, thinner or any other such chemicals for cleaning the ventilating fan.
2. Do not allow water to enter motor
3. Do not immerse plastic parts in water above 60° degrees


- 1 Remove louver, cover and blades.




- 2 Wash and clean louver, cover and blades.



- 3 Clean dirt on fan body using a cleaner.

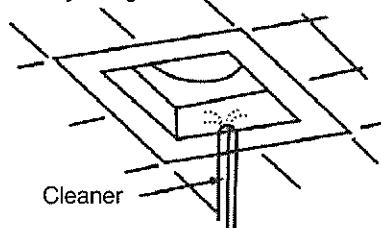

- 4 Using a soft cloth dampened with kitchen detergent, to remove any dirt from fan body. wipe dry with clean cloth. Replace the louver, cover and blades.

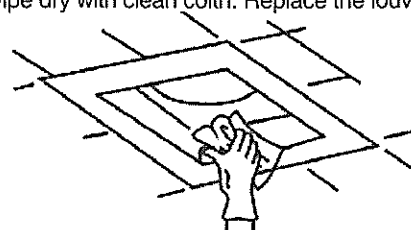

Distributed by: Securimax (A trading name of Simx Limited)

Ph: 09 259 1660 | Technical Support Ph: 09 259 1662

Email: sales@securimax.co.nz | Web: www.securimax.co.nz

Securimax reserves the right to alter technical specifications without prior warning