


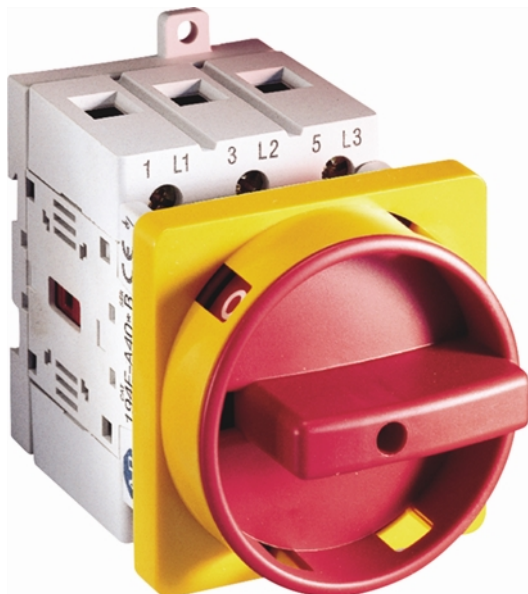

Representative Photo Only
(actual product may vary based on configuration selections)

Load Break Switch UL/IEC 194E Din Rail 3P 63A

- Suitable as At-Motor Disconnect Switch (UL508) useful for overseas application with added UL requirements
- Bulletin 194R also suitable as service entrance disconnecting (UL98) providing even greater application use
- Greater installation flexibility with selection of front/door or DIN/base mounting configurations (194E series only)
- Padlockable Handles Available (up to 3 padlocks) for added security
- Wide range of accessories available which is flexible in adapting to various applications and reduces the cost of management and storage

SPECIFICATIONS

Product Series	Bul. 194E
Operator Type	Off/On Switch (Isolator) type
Number of Poles	3
I _{cw} , short time withstand current, 1s (rms)	1300 kA for 1s
U _i , Rated Insulation Voltage	600 V (rms)
U _{imp} , Impulse Withstand Voltage	8 kV
I _e , Rated Operational Current, AC-21a, 400V	63 A@400V
I _e , Rated Operational Current, AC-21a, 415V	63 A@415V
I _e , Rated Operational Current, AC-21a, 690V	63 A@690V
kW Rating, AC-23a, 400V, 3ph	22 kW @400V
kW Rating, AC-23a, 690V, 3ph	30 kW @690V
Wire / Conductor Size, Flex Cable, Min	2.5 mm ² min
Wire / Conductor Size, Flex Cable, Max	16 mm ² max
Wire / Conductor Size, Rigid Cable, Min	2.5 mm ²
Wire / Conductor Size, Rigid Cable, Max	25 mm ²
Height	180 mm
Width	125 mm
Depth	105 mm
Operating Temperature, Min	-25 °C min
Operating Temperature, Max	60 °C max
Storage Temperature, Min	-40 °C min
Storage Temperature, Max	80 °C max

Catalogue No: **194E-A63-1753**

LBS BASE/DIN OFF-ON 3P 63A

Power Distribution and Protection > Isolators and Transfer Switches > Load Break Switches > Allen-Bradley Load Break Switches > 194E Load Break Switches (16 to 100A) > Base / DIN Rail Mounting



REFERENCES	
IECEX Certificate	-
Supplier Declaration of Conformity:	-
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-