Catalogue No: **MOD6RCCB4-63-30-A**

RCCB MOD6 3P+N 63A 30mA TYPE A

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > MOD6 Residual Current Device > MOD6 RCCBs (Safety Switches) > Type A



Representative Photo Only
(actual product may vary based on configuration selections)

MOD6 RCCB, 4P, 6kA, 30mA, 63A, type A

- Complies with AS/NZS 61008 (RCCBs)
- MOD6 RCCBs feature 6kA conditional short circuit rating
- 1P+N and 3P+N for single or three phase loads
- Type AC or Type A RCD option
- 30mA sensitivity featured as standard simplifying the selection for personnel protection applications
- Fast connection pin/fork busbar comb or busbar chassis
- Suits pole covers and loadcentre's
- Approval No NSW17482 or RCM Mark

SPECIFICATIONS	
Product Series	MOD6
Component Type Power Distribution & Protection	RCD
RCD Type, AS/NZS 61008/61009	A
Tripping Time at IΔn, Instantaneous	<40 ms
In, Rated Current at 30°C	63 A @30°C
IΔc, Rated Conditional Residual Short-Circuit Current	6 kA
IΔn, Rated Leakage Current	30 mA
Poles	3P + N
Neutral Pole Protected	Yes
Rated Frequency	50 / 60 Hz Hz
Un, Nominal Operational Voltage, AC	415 V AC
Ubmin, Service Voltage, AC, Min	287 V AC
Ubmax, Service Voltage, AC, Max	455 V AC
Selectivity Class (IEC 60898)	A
Im, Rated Make/Break Capacity	500 A
IΔm, Rated Residual Make/Break Capacity	500 A
Inc, Rated Conditional Short Circuit Current	10 kA
IΔc, Rated Conditional Residual Short-Circuit Current	6000 A
Icn, Rated Short Circuit Capacity	6 kA
Isolator Application, IEC 60947-2	Yes
Ui, Rated Insulation Voltage	500 V (rms)
Ui, Rated Insulation Voltage, Protection Degree 2	500
Insulation Resistance	1000 MΩ
Dielectric Strength	2500V
Electrical Service Life at Un, In	10000 cycles
Mechanical service life	20000 cycles
Conductor Entry Position	Top / Bottom
IP Rating, Inside	IP40

Catalogue No: **MOD6RCCB4-63-30-A**

RCCB MOD6 3P+N 63A 30mA TYPE A


IP Rating, Outside	IP20
Flammability Rating (UL94)	UL 94 V-2
Wire / Conductor Size, Rigid Cable, Top, Max	50 mm² Top
Wire / Conductor Size, Rigid Cable, In, Min	1.5 mm² In
Wire / Conductor Size, Flex Cable, Top, Max	35 mm² Top
Wire / Conductor Size, Rigid Cable, Out, Min	1.5 mm² Out
Wire / Conductor Size, Rigid Cable, Bottom, Max	50 mm² Bottom
Wire / Conductor Size, Flex Cable, In, Min	1.5 mm² In
Wire / Conductor Size, Flex Cable, Bottom, Max	35 mm² Bottom
Wire / Conductor Size, Flex Cable, Out, Min	1.5 mm² Out
Tightening Torque, Top, Nominal	5 Nm
Tightening Torque, Bottom, Nominal	5 Nm
Busbar System, Top	Fork Pin
Busbar System, Bottom	Fork Pin
Trip-Free Mechanism	Yes
Mounting	DIN-35 Rail Mount
Sealable	Yes Y / N
Centre Trip Position	No Y / N
Height	86 mm
Width	72 mm
Depth	76 mm
Weight	0.368 kg
Package Quantity	1 qty
Approval(s)	N17482
Neutral Pole Switched	Yes
Operating Temperature, Min	-5 °C min
Operating Temperature, Max	55 °C max
Storage Temperature, Min	-25 °C min
Storage Temperature, Max	70 °C max
Relative Humidity, Max	95 %RH
Shock Acceleration (Max.)	40 g
Shock Duration (Max.)	5 ms
Shock Rating	IEC 60077-16-3
Vibration Acceleration (Max.)	1.5 g
Vibration Rating	IEC 60068-2-6
Standards Compliance	AS/NZS 61008 AS/NZS 61008-1 AS/NZS 61009 IEC 60077-16-3 IEC 60947-2
Certifications	RCM

Catalogue No: **MOD6RCCB4-63-30-A**

RCCB MOD6 3P+N 63A 30mA TYPE A

Power Distribution and Protection > Circuit Breakers > Miniature Circuit Breakers and Earth Leakage Protection (RCDs and RCBOs) > MOD6 Residual Current Device > MOD6 RCCBs (Safety Switches) > Type A


REFERENCES	
IECEx Certificate	-
Supplier Declaration of Conformity:	MOD6RCCBxxxxx_Supplier Declaration of Conformity (SDoC)
Installation Guide:	-
User Manual:	-
Manufacturer Datasheet:	-
Manufacturer Catalogue & Product Selection:	-

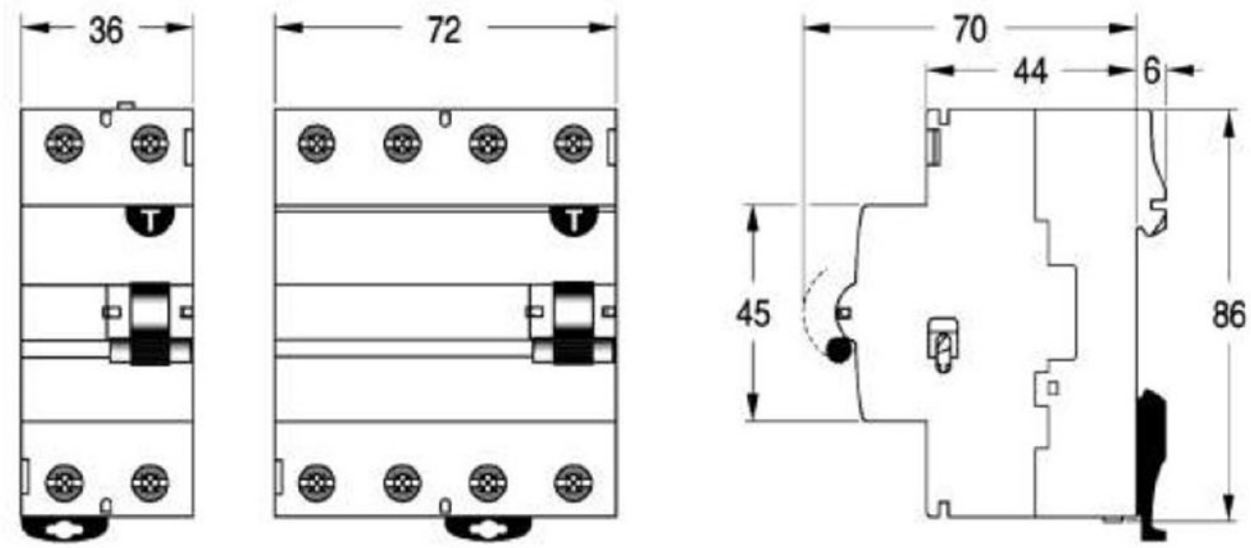

Dimension Diagram

Catalogue No: **MOD6RCCB4-63-30-A**

RCCB MOD6 3P+N 63A 30mA TYPE A

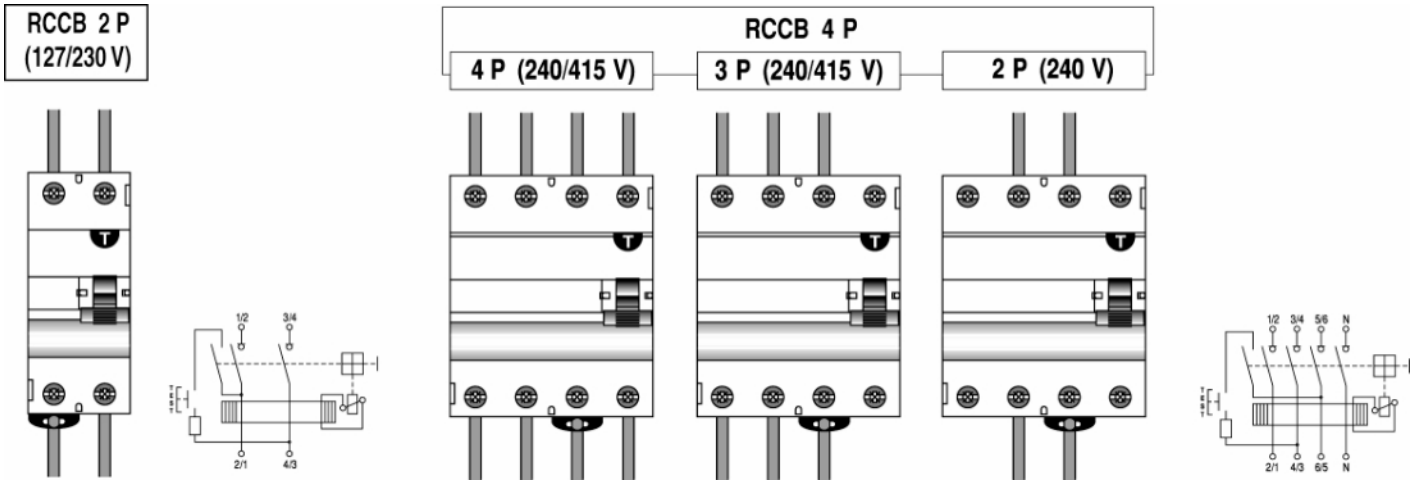

Connection / Wiring Diagram