


# Catalogue No: **CA7-23-10-110VAC**

## CONTACTOR 11kW 3P 110V AC COIL 1NO AUXILIARY

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7  
Contactors 4 to 55kW > 3 Pole Contactors with AC Coil

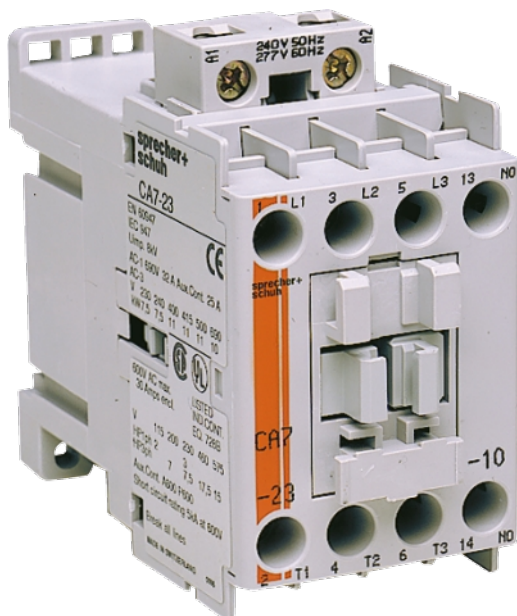

Representative Photo Only  
(actual product may vary based on configuration selections)

### Contactor 3 pole 23A 11kW 1N/O Auxiliary 110V AC Coil

- Available in AC or DC control coil versions to suit your application requirements
- Common accessories across CA7 contactors simplifies inventory requirements and maximises usability
- Reversible (line or load side) coil terminations provides total flexibility
- DIN rail mountable for easy installation

#### SPECIFICATIONS

|                                                  |                    |
|--------------------------------------------------|--------------------|
| Product Series                                   | CA7-23             |
| Component Type Motor Control and Drives          | Standard Contactor |
| Ie, Rated Operational Current, AC-1, 415V, 40°C  | 32 A@415V,40°C     |
| kW Rating, AC-3, 415V, 60°C                      | 11 kW @415V, 60°C  |
| Ie, Rated Operational Current, AC-3, 415V, 60°C  | 23 A@415V,60°C     |
| kW Rating, AC-3, 690V, 60°C                      | 10 kW @690V, 60°C  |
| Ie, Rated Operational Current, AC-3, 690V, 60°C  | 12 A@690V,60°C     |
| Number of Poles                                  | 3                  |
| Contact Configuration, Main Poles                | 3 NO main poles    |
| Coil Type                                        | Conventional type  |
| Coil Consumption Hold-in VA AC coiled contactors | 3.1 VA<br>12.3     |
| Coil Consumption Pickup VA AC coiled contactors  | 105 VA             |
| Integrated Aux                                   | 1 N/O              |
| Coil Voltage                                     | 110 V AC V         |
| Un, Coil Voltage, AC @50Hz, Nom                  | 110 V AC nom @50Hz |
| Un, Coil Voltage, AC @50Hz, Min                  | 93 V AC min @50Hz  |
| Un, Coil Voltage, AC @50Hz, Max                  | 121 V AC max @50Hz |
| Un, Coil Voltage, AC @60Hz, Nom                  | 120 V AC nom @60Hz |
| Un, Coil Voltage, AC @60Hz, Min                  | 102 V AC min @60Hz |
| Un, Coil Voltage, AC @60Hz, Max                  | 132 V AC max @60Hz |
| Tightening Torque, Power Terminals, max          | 2 Nm max           |
| IP Rating                                        | IP20               |

Catalogue No: **CA7-23-10-110VAC**  
**CONTACTOR 11kW 3P 110V AC COIL 1NO AUXILIARY**

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7  
Contactors 4 to 55kW > 3 Pole Contactors with AC Coil



#### REFERENCES

IECEX Certificate -


Supplier Declaration of  
Conformity: -

Installation Guide: -

User Manual: -

Manufacturer Datasheet: -

Manufacturer Catalogue  
& Product Selection: -

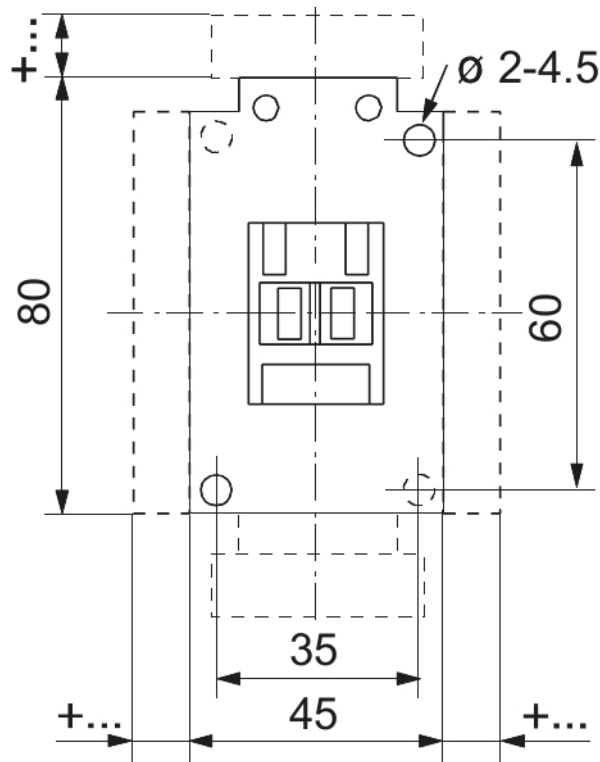

Dimension Diagram

Catalogue No: **CA7-23-10-110VAC**

**CONTACTOR 11kW 3P 110V AC COIL 1NO AUXILIARY**

Motor Control and Drives > Motor Starting and Protection > Contactors > Sprecher + Schuh Contactors > CA7  
Contactors 4 to 55kW > 3 Pole Contactors with AC Coil

