


MD6RL3230A

NHP MOD6+ RCBO 6kA 1 Pole and N 32A C Curve 30mA Type A (Longbody)

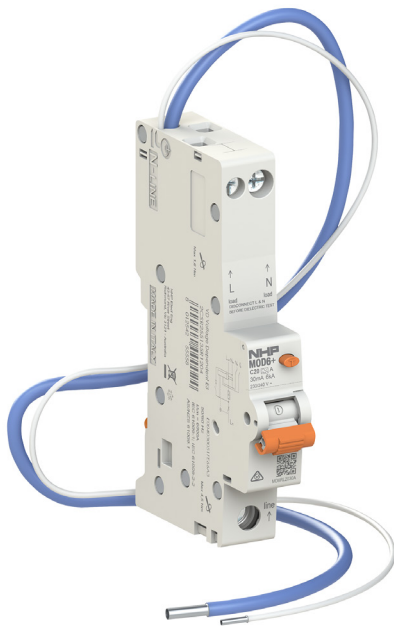

Component type	Earth leakage circuit breaker
Range	MOD6+ Residual Current Devices
Model	N/A
Product status	New Item

NHP MOD6+ Residual Current Devices (RCDs) offer a 6kA rating with a proven history in domestic and commercial applications. The MOD6+ RCD range offers many solutions for both 1 phase in 10mA and 30mA sensitivities as well as 3 phase in 30mA sensitivities. The MOD6+ RCDs can be easily installed into NHP Loadcenters, as well as MOD6+ RCBOs into MOD6+ Distribution Panelboards.

ELECTRICAL

Rated current	32 A
Rated voltage	240 V
Rated leakage current	30 mA
Frequency	50/60 Hz
Rated short-circuit breaking capacity according to AS/NZS 61009	6 kA
Voltage type	AC
Trip curve	C
Rated impulse withstand voltage Uimp	4 kV
Leakage current type	A
Tripping time	300 ms
Min. service voltage	184 V
Max. operating voltage (Umax)	264 V
Rated residual make/break capacity	6000 A
Protected neutral pole	No
Number of poles (total)	2
Electrical life at Un, In (service cycles)	10000 cycles
Type of electric connection	Pin
Isolator application	Yes
Rated insulation voltage Ui	500 V
Concurrently switching neutral conductor	No

CONSTRUCTION

Mounting method	DIN rail
Degree of protection (IP)	IP40
Number of protected poles	1
Mechanical life (service cycles)	20000 cycles
Disconnection characteristic	Undelayed

MECHANICAL

MD6RL3230A

NHP MOD6+ RCBO 6kA 1 Pole and N 32A C Curve 30mA Type A
(Longbody)



MOD6+[™]
RESIDUAL CURRENT DEVICES

MECHANICAL

Connectable conductor cross section solid-core	1-35 mm ²
Connectable conductor cross section multi-wired	1-25 mm ²
Max. shock duration	13 ms
Max. shock acceleration	30 g
Max. vibration duration	13 min

DIMENSIONS

Depth	76 mm
Height	116 mm
Width	17.5 mm
Weight	0.2 kg
Width in number of modular spacings	1

ENVIRONMENT

Operating temperature	-25...55 °C
Pollution degree	2


MD6RL3230A

NHP MOD6+ RCBO 6kA 1 Pole and N 32A C Curve 30mA Type A (Longbody)



MOD6+TM
RESIDUAL CURRENT DEVICES

CIRCUIT DIAGRAM

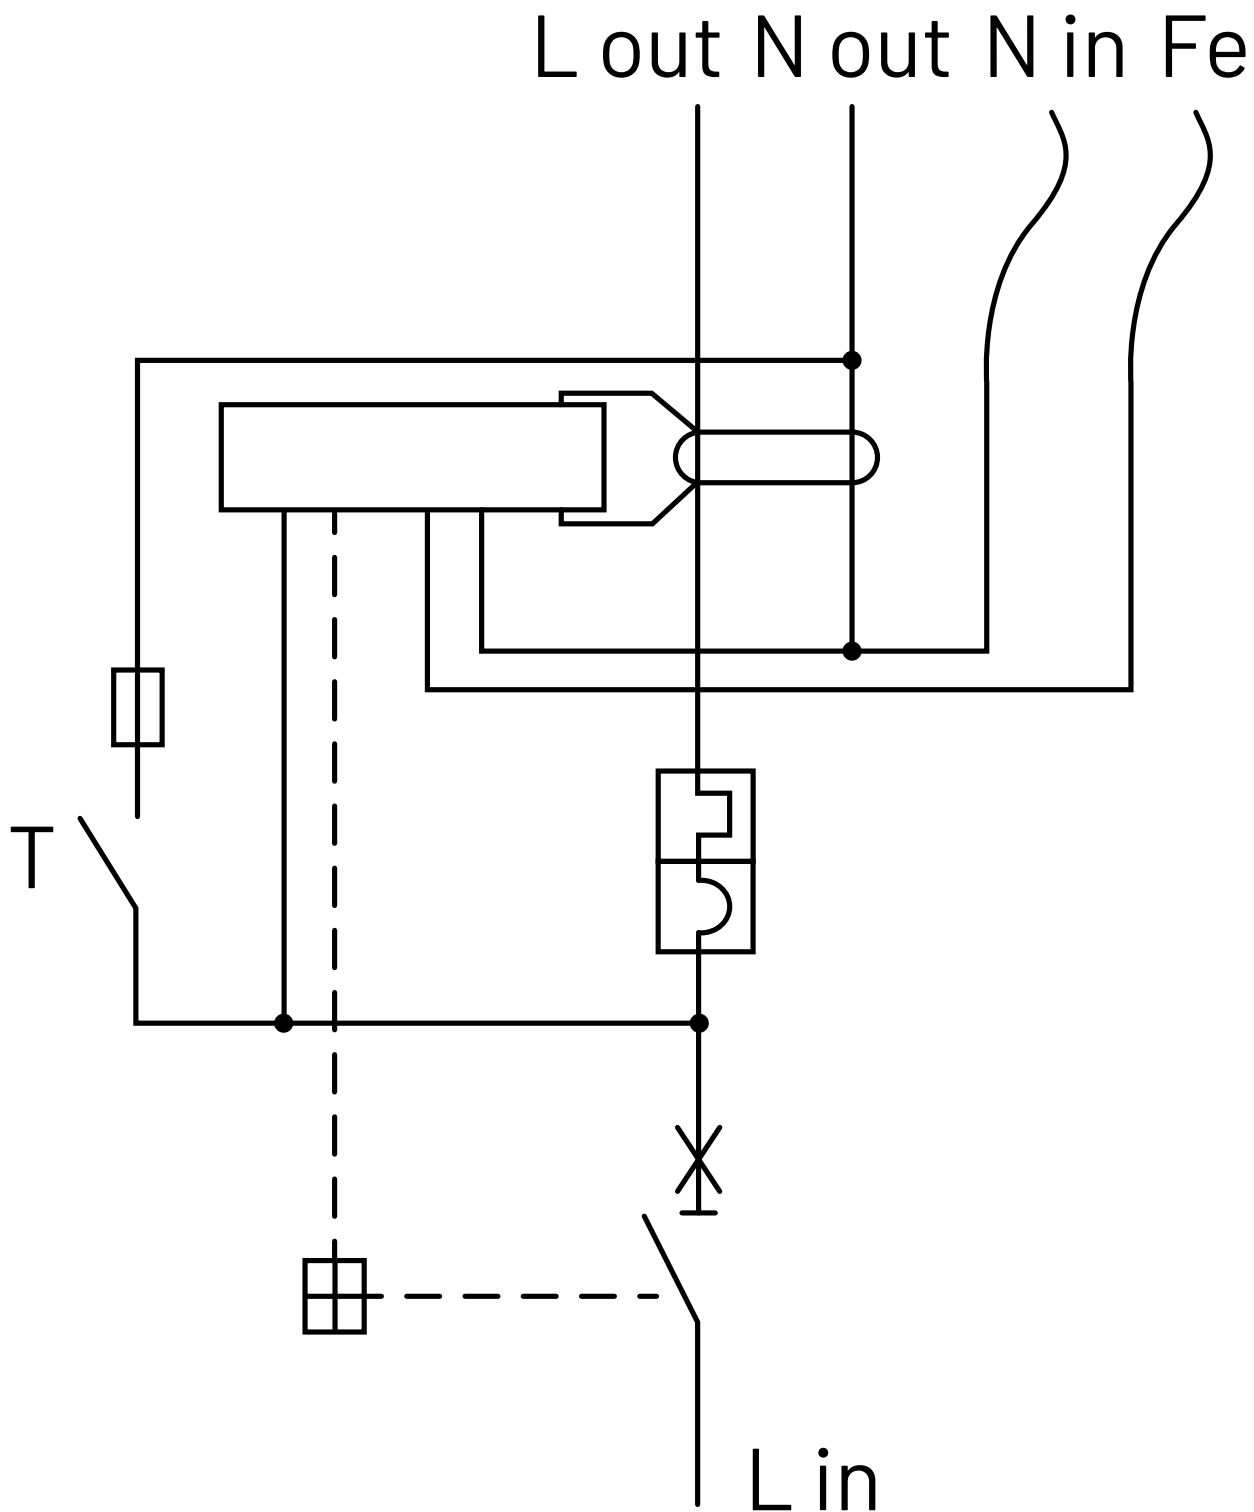

MD6RL3230A

NHP MOD6+ RCBO 6kA 1 Pole and N 32A C Curve 30mA Type A
(Longbody)



MOD6+TM
RESIDUAL CURRENT DEVICES

DIMENSIONAL DIAGRAM

