

CARMEL

GIMBLE COB LED DOWNLIGHT


GDL914/6/8



FEATURES

- Die-cast aluminium body
- Powder coated finish
- PC optical lens and reflector
- LED driver included, pre-wired
- LED lifespan: 50000 Hours @L70, Ta 25°C
- Ta: -20°C to +40°C

DIMENSION

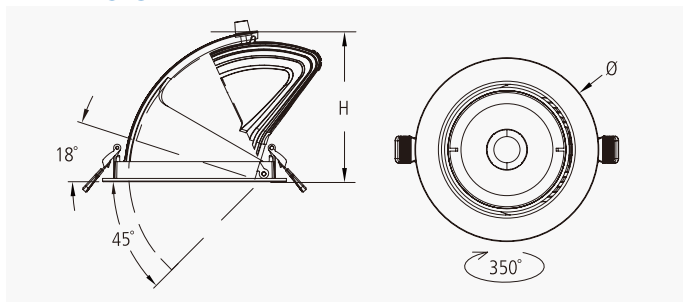

OVERVIEW




OPTIONS

- **DIMMING:**
 - Analogue dimming (Trailing edge, 1~10V)
 - Digital dimming (DSI, DALI)

- **ADAPTER:**

GDL918/ADAPTER PLATE



Cut out size: Ø195

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (Ø×H) (mm)	CUT OUT SIZE (Ø) (mm)	FITTING COLOUR	CARTON QUANTITY
GDL914/24 WW	230	24	1920	3000	>90	38	140 x 114.5	125	White	18
GDL914/24 CW	230	24	2100	4000	>90	38	140 x 114.5	125	White	18
GDL916/33 WW	230	33	2447	3000	>90	38	158 x 130	145	White	12
GDL916/33 CW	230	33	2660	4000	>90	38	158 x 130	145	White	12
GDL918/36 WW	230	36	3700	3000	>90	60	188 x 159	170	White	8
GDL918/36 CW	230	36	3800	4000	>90	60	188 x 159	170	White	8