

BIRMINGHAM


IP66 LED FLOOD LIGHT

GFL600




FEATURES


- Die-cast aluminium housing
- Carbon steel bracket
- Tempered glass cover
- Basic UV protection
- Adjustable bracket with scales for lighting positioning
- Built-in LED driver and 10KV Surge Protection Device
- Pre-wired with 1m power cable
- LED lifespan: 50000hrs @ L70, Ta 25°C
- Ta: -30°C to +50°C

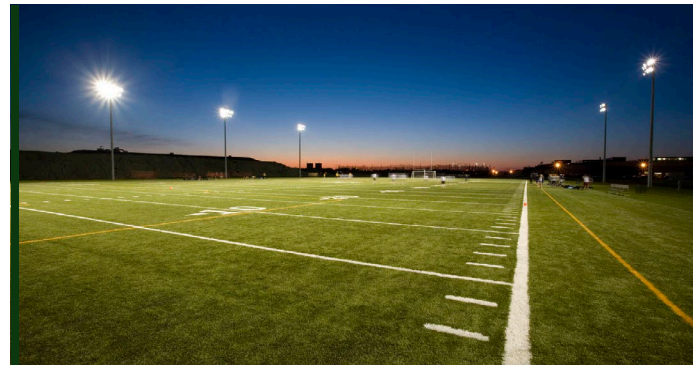

DIMENSION

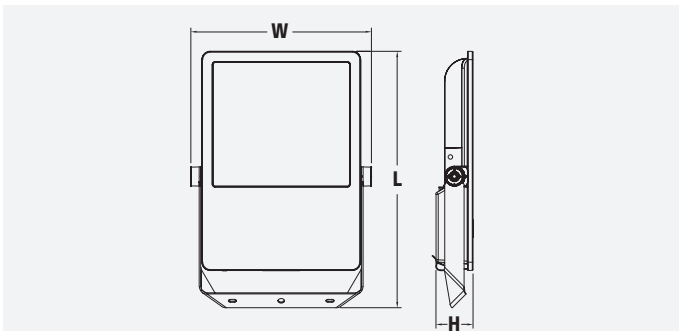

PHOTOMETRIC DATA

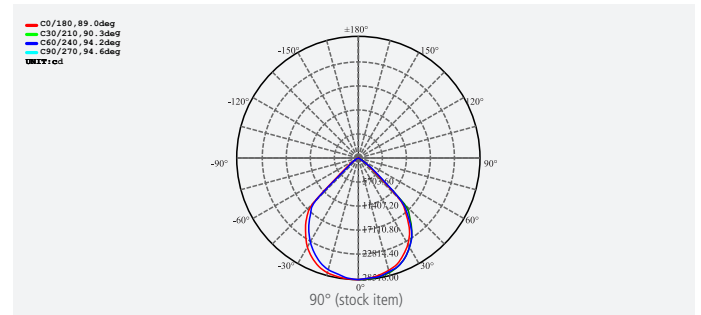


TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (Ø×H) (mm)	NET WEIGHT (Kg)	FITTING COLOUR
GFL600/300W CW	230	300	39000	4000	>70	90	657 x 463 x 96	14.5	Light Grey
GFL600/400W CW	230	400	52000	4000	>70	90	657 x 463 x 96	14.5	Light Grey
GFL600/500W CW	230	500	65000	4000	>70	90	716 x 592 x 86	18.5	Light Grey


OPTIONS

• BEAM ANGLE:


20°, 30°, 60°, 120°, 50°×100°




20°




30°



60°



120°



50°×100°

