

LOTO II GLW101

IP65 UP AND DOWN WALL LIGHT SUITABLE FOR INDOOR AND OUTDOOR USE




FEATURES

- Die-cast aluminium body
- Polyester powder-coated finish
- Clear glass diffuser
- Integrated constant current driver
- Power factor: ≥ 0.9
- Light source: Lumileds 2835 SMD chips
- Colour matching 5 MacAdam steps
- Class I luminaire, requires earth
- LED lifespan: 50,000 hours @ L80, Ta 25°C
- Ta: -25°C to +45°C



Independently adjustable beam angles


DIMENSIONS



Unit: mm

PHOTOMETRIC DATA

— C0/180, 107.1
— C90/270, 78.3
UNIT: cd

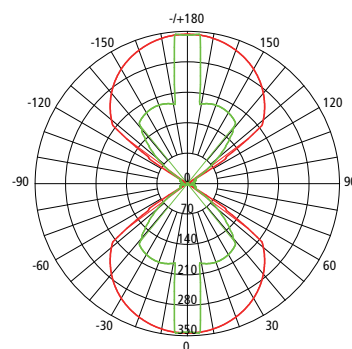

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GLW101 WW BK	230	10	842	3000	>80	0-90	Matt black	6
GLW101 WW WH	230	10	842	3000	>80	0-90	Matt white	6