

PRO PANEL

SLIM RECESSED PRO LED PANEL

GPN4126

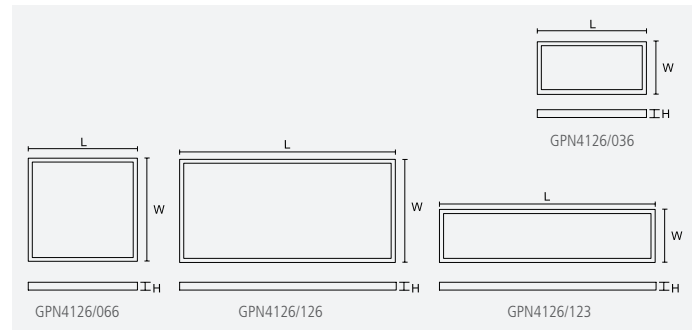

FEATURES

- SUPER Slim design
- Extruded aluminium frame
- Powder coated finish
- PMMA light guide plate & high transparency diffuser
- Constant current LED driver included, pre-wired
- Standard metric T-Bar ceiling recessed installation
- LED lifespan: 50000 Hours @ L70, Ta 25°C
- Ta: -20 to +40°C

OPTIONS

- **DIMMING:**
 - Analogue dimming (Trailing edge, 1~10V)
 - Digital dimming (DSI, DALI)
- **INSTALLATIONS:**
 - Plaster ceiling recessed installation
 - Surface mounted installation
 - Suspended installation

DIMENSION



TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (LxWxH) (mm)	FITTING COLOUR	CARTON QUANTITY
GPN4126/036 CW	230	24	2400	4000	100	595 x 295 x 10	White	5
GPN4126/066 CW	230	36	3600	4000	100	595 x 595 x 10	White	5
GPN4126/066 DL	230	36	3600	6000	100	595 x 595 x 10	White	5
GPN4126/123 CW	230	36	3600	4000	100	1195 x 295 x 10	White	5
GPN4126/123 DL	230	36	3600	6000	100	1195 x 295 x 10	White	5
GPN4126/126 CW	230	50	5000	4000	100	1195 x 595 x 10	White	3
GPN4126/126 DL	230	50	5000	6000	100	1195 x 595 x 10	White	3

Specifications above are for reference only and may vary without prior notice