

BLADE

TRI COLOUR LED BATTEN

GBT505 TC



GBT505/60 TC





GBT505/120 TC



FEATURES

- Extruded aluminium body with plastic end cap
- Powder coated finish
- Opal polycarbonate diffuser
- Feet removal for flush mounting
- Rear cable channel allows easy wiring
- Built-in constant current LED driver
- Select colour temperature with DIP switch
- LED lifespan: 50000 Hours @L70, Ta 25°C
- Ta: 0 to +25°C

DIMENSION

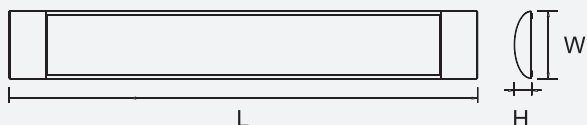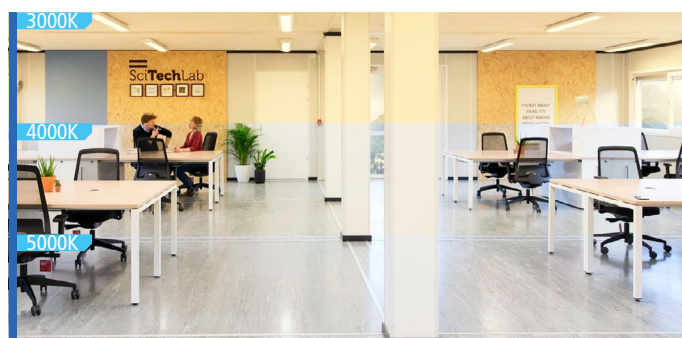

Select colour temperature with DIP switch



• **DIP SWITCH**

Rear cable channel



TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (L×W×H) (mm)	FITTING COLOUR	CARTON QUANTITY
GBT505/60 TC	230	25	2200/2600/2400	3000/4000/5500	110	613 x 120 x 34	White	6
GBT505/120 TC	230	48	4400/5000/4800	3000/4000/5500	110	1213 x 120 x 34	White	6