

NOVA

IP65 LED STREET LIGHT

GST708



GST708/40



GST708/80



GST708/120



GST708/180





FEATURES

- Die-cast aluminium body
- Powder coated finish
- Good quality LED driver fitted
- LED lifespan: 50000 Hours @ L70, Ta 25°C
- Ta: -40°C to +60°C

OPTIONS

- DIMMING:
 - COLOUR TEMPERATURE: 4000K
 - PHOTOCELL SENSOR VERSION

DIMENSION

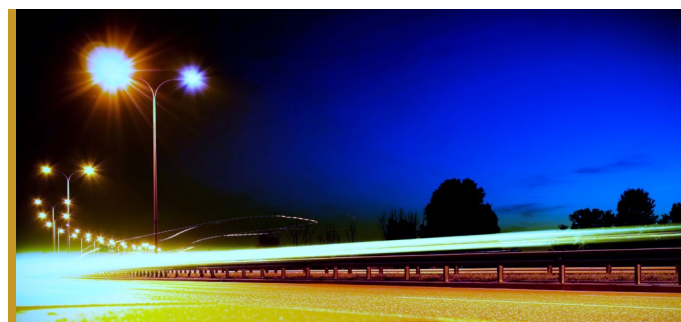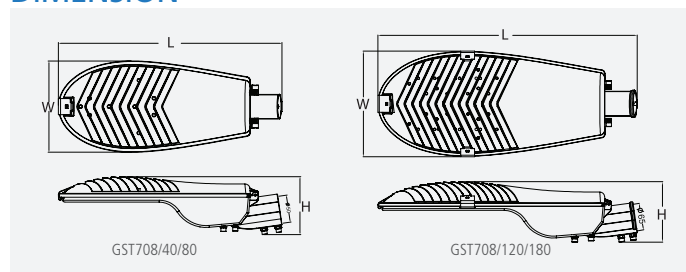


ACCESSORIES

ACCESSORIES MODEL NO.		SUITABLE LIGHT	DIAME- TER
GST708/APP		GST708/40 GST708/80	Ø65
GST708/ADS-53		GST708/40 GST708/80	Ø53
GST708/ADS-65		GST708/120 GST708/180	Ø65

TECHNICAL SPECIFICATIONS


MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	BEAM ANGLE (°)	DIMENSIONS (L×W×H) (mm)	FITTING COLOUR	NET WEIGHT (kg)
GST708/40	230	40	3800	6000	160 x 90	522 x 216 x 137	Sand Grey	3.68
GST708/80	230	80	6800	6000	160 x 90	629 x 268 x 148	Sand Grey	5.45
GST708/120	230	120	10200	6000	160 x 90	752 x 310 x 178	Sand Grey	8.5
GST708/180	230	160	16200	6000	160 x 90	863 x 359 x 199	Sand Grey	10.61

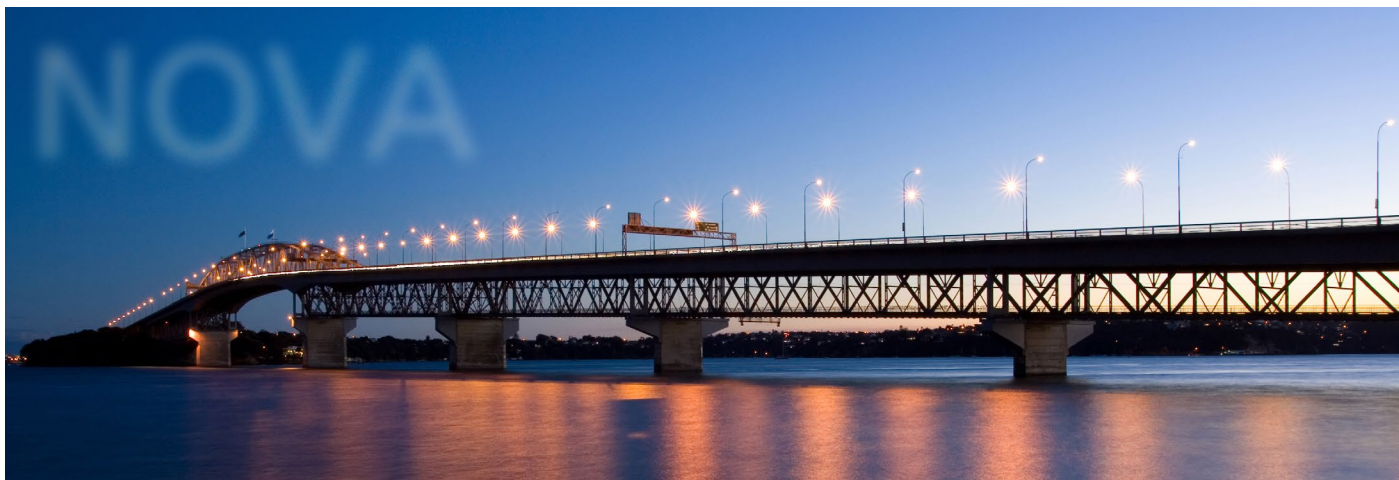

EXPLODED DRAWING



PHOTOMETRIC DATA

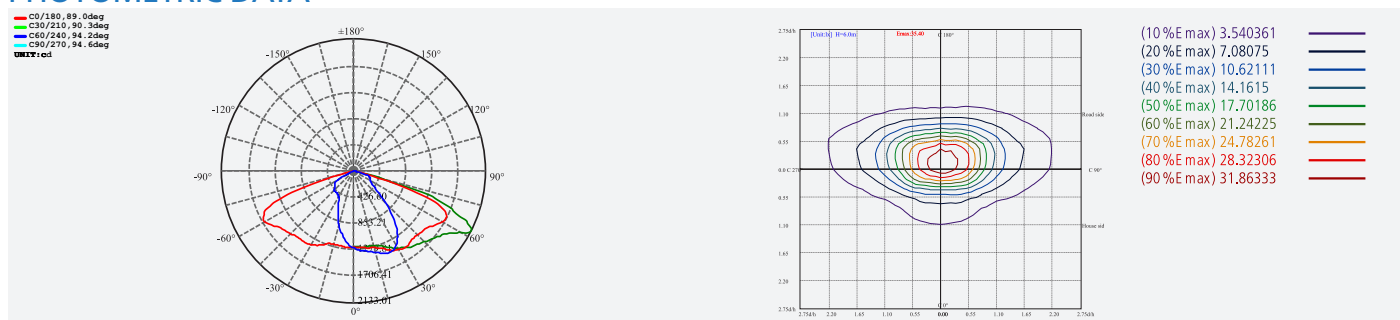

Specifications above are for reference only and may vary without prior notice