VERSATILE GLW758

MULTIPLE FUNCTIONAL WALL PACK LIGHT




Tri-COLOUR | IP65 | SELECT WATTAGE | IK08 | 5 YEARS WARRANTY


FEATURES

- Die-cast aluminium housing with polycarbonate lens and diffuser
- Compact design with dark-front polycarbonate diffuser
- Asymmetrical forward light and downlight, independently switchable
- Selectable wattage: 80W/100W/120W
- Integrated dusk-to-dawn photocell with timer-based dimming
- Rear cable entry or conduit mounting from both sides and top
- High-efficiency LED chips delivering up to 150lm/W
- LED lifespan: 50,000 hours @ L80 B20, Ta 25°C
- Ta: -20°C to + 45°C

PHOTOMETRICS

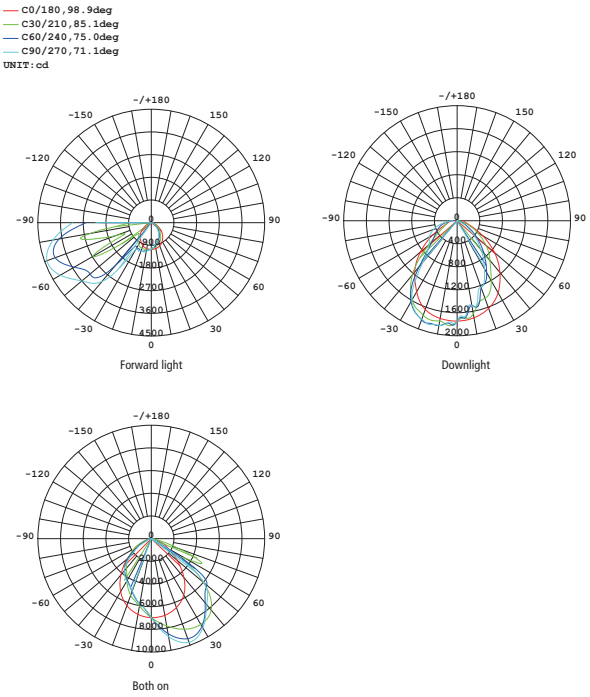

DIMENSIONS

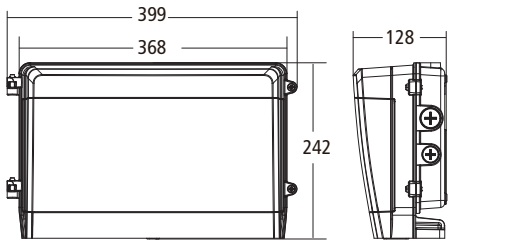

UNIT: mm

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	OUTPUT CURRENT (mA)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	R9	FITTING COLOUR	CARTON QUANTITY
GLW758 TC BK	100-277	80/100/120	530	5600/7000/8400	3000/4000/5700	>80	>-10	Black	4

Specifications above are for reference only and may vary without prior notice

Sustainable Design

COLOUR TEMP SELECTABLE: 3000/4000/5700K


FORWARD LIGHT
forward light operates at only 50% of the selected total power.

DOWNLIGHT
downlight operates at only 50% of the selected total power.

BOTH ON
operates at 100% of the selected total power.

DARK PC DIFFUSER DESIGN
keeps the fitting neat and tidy during the daytime when the light is not in use.

ASYMMETRICAL FORWARD LIGHT

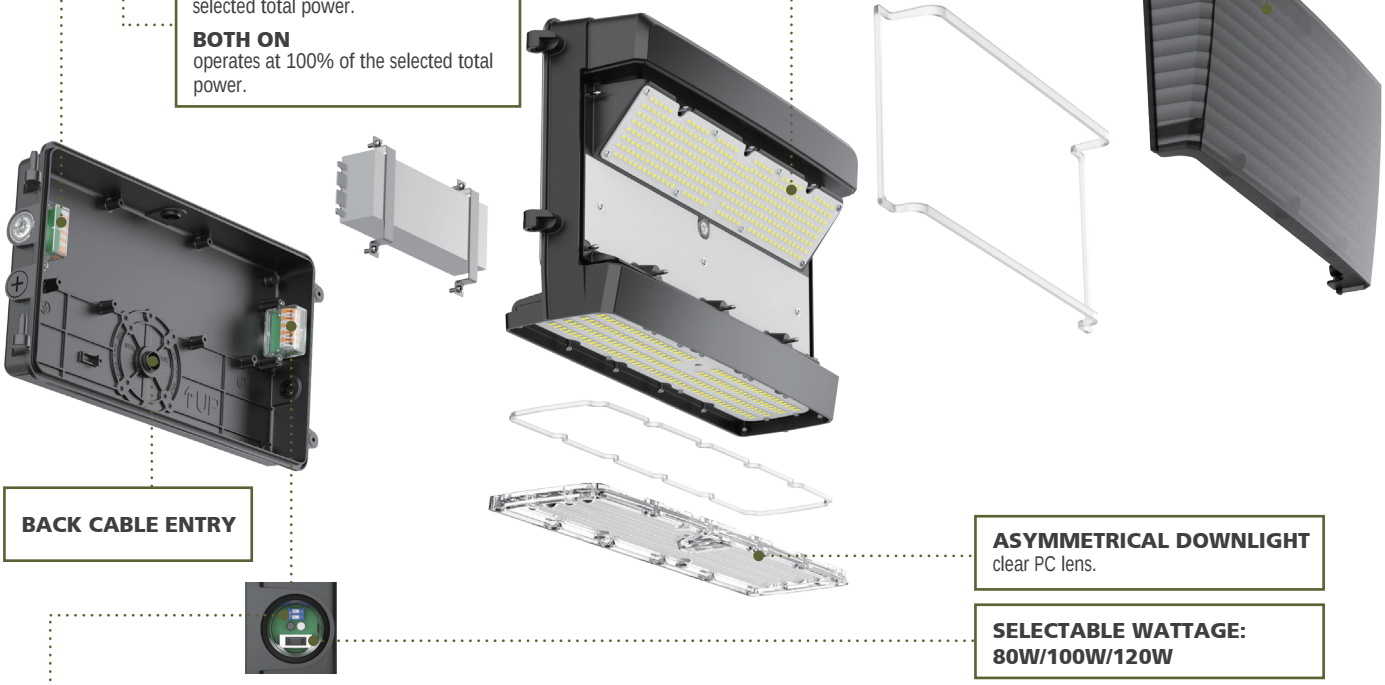

BACK CABLE ENTRY

ASYMMETRICAL DOWNLIGHT
clear PC lens.

SELECTABLE WATTAGE: 80W/100W/120W


TIMED DIMMING & DUSK-TO-DAWN PHOTOCELL

❶ DUSK-TO-DAWN PHOTOCELL
The light will automatically turn on when the ambient light level falls below 50 lux and will switch off when the light level exceeds 350 lux. It can also be turned off manually when not required.

❷ TIMER DIMMING SWITCH
Output is set to 100% for the first 6 hours, reduced to 50% for the next 3 hours, and further reduced to 30% for the subsequent 3 hours. Manual shut-off is available when not required.

❸ DUSK-TO-DAWN PHOTOCELL+ TIMER DIMMING SWITCH
The light switches on at dusk and operates at full brightness for 6 hours, then dims to 50% for 3 hours and 30% for the next 3 hours.

Factory setting: 120W, 4000K

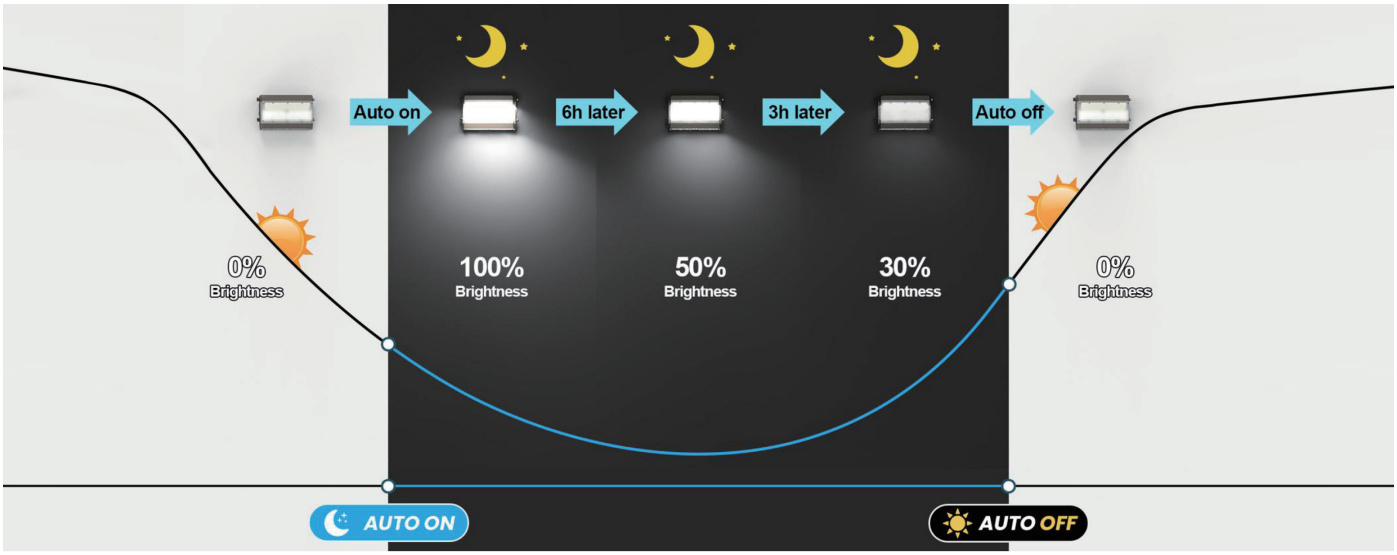

Specifications above are for reference only and may vary without prior notice