GPL803 HALO

IP66 SLEEK GEOMETRIC DESIGN POST TOP



FEATURES

- Aluminium alloy housing with textured glass diffuser
- Powder coated in black colour (RAL9017)
- C3 anti-corrosion
- Built-in constant current LED driver
- 4KV L-N, 6KV L/N-E surge protection
- Selectable wattage: 20W/30W/40W
- Factory setting: 40W, 3000K
- High-efficiency LED chips delivering > 100lm/W
- Power factor > 0.9, flicker factor < 1%
- LED lifespan: 105000 hours @ L80 B50, Ta 25°C
- Ta: -30°C to + 50°C


IMAGES



Side view



Top view

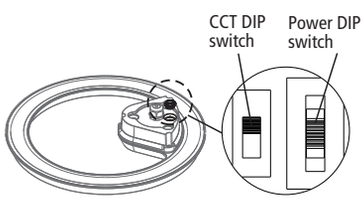



Power and CCT selectable

DL	100%(40W)
CW	75%(30W)
WW	50%(20W)

Factory setting: 40W, 3000K

DIMENSIONS






Unit: mm

76-60mm ADAPTOR (included)



PHOTOMETRIC DATA

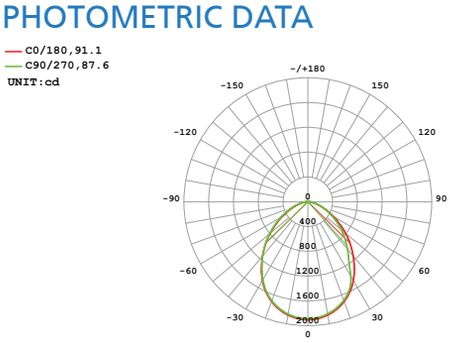

Symmetrical 90° U00A08

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	FITTING COLOUR	CARTON QUANTITY
GPL803 TC BK	230	20/30/40	2100/3150/4200	3000/4000/5000	>80	Black	1

Specifications above are for reference only and may vary without prior notice