

LEORA

TRI-COLOUR LOW GLARE AND HIGH CRI BACK LIT TROFFER

GTF4102




FEATURES

- Extruded aluminium frame
- Powder coated finish
- Micro-prismatic diffuser for better glare control
- Constant current LED driver included, pre-wired
- Standard metric T-Bar ceiling recessed installation
- Select colour temperature with DIP switch
- LED lifespan: 50000 Hours @ L70, Ta 25°C
- Ta: -20°C to +40°C



DIMENSION

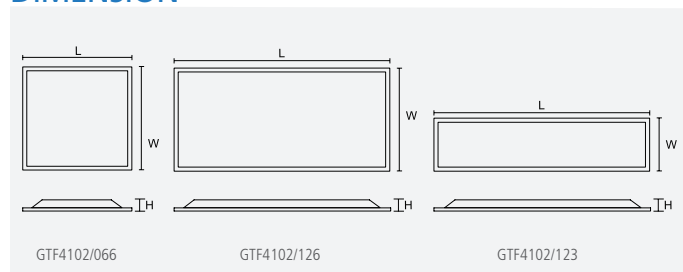

OPTIONS

- **DIMMING:**
 - Analogue dimming (Trailing edge, 1~10V)
 - Digital dimming (DSI, DALI)
- **INSTALLATIONS:**
 - Plaster ceiling recessed installation
 - Surface mounted installation
 - Suspended installation

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	BEAM ANGLE (°)	DIMENSIONS (L×W×H) (mm)	FITTING COLOUR	CARTON QUANTITY
GTF4102/066 TC	230	36	3420	3000/4000/5700	>90	110	595 x 595 x 32	White	5
GTF4102/123 TC	230	36	3420	3000/4000/5700	>90	110	1195 x 295 x 32	White	5
GTF4102/126 TC	230	50	5250	3000/4000/5700	>90	110	1195 x 595 x 32	White	4

Specifications above are for reference only and may vary without prior notice