PVC Garden Lighting

PVC garden lighting

Contact
Sales and Customer Solutions
sales.nz@nexans.com

Nexans Ref.: JSF4GLBK100
Country Ref.: 4775

Figure 8, Stranded Cu conductors, Black PVC insulation (parallel web), Water resistant.



DESCRIPTION

Pack sizes available: 100m spool

STANDARDS

International
Manufacturer specification

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.

PVC Garden Lighting


PVC garden lighting

Contact
Sales and Customer Solutions
sales.nz@nexans.com

CHARACTERISTICS

Construction characteristics	
Conductor material	Plain annealed copper
Type of conductor	Stranded copper
Insulation	PVC
Dimensional characteristics	
Number of cores	2
Conductor cross-section	4 mm²
Stranding (No./mm)	56/0.30
Nominal Overall Size (mm)	5.0 x 10.4
Approximate weight	0.12 kg/m
Electrical characteristics	
Max. DC resistance of the conductor at 20°C	4.95 Ohm/km
Voltage drop single phase at 45°C	10.9 mV/A.m
Maximum operating voltage	50 VAC / 120 VDC
Usage characteristics	
Packaging	Spool 100m
Maximum operating temperature	75 °C
Water proof	Yes

WHICH CABLE IS BEST FOR YOU

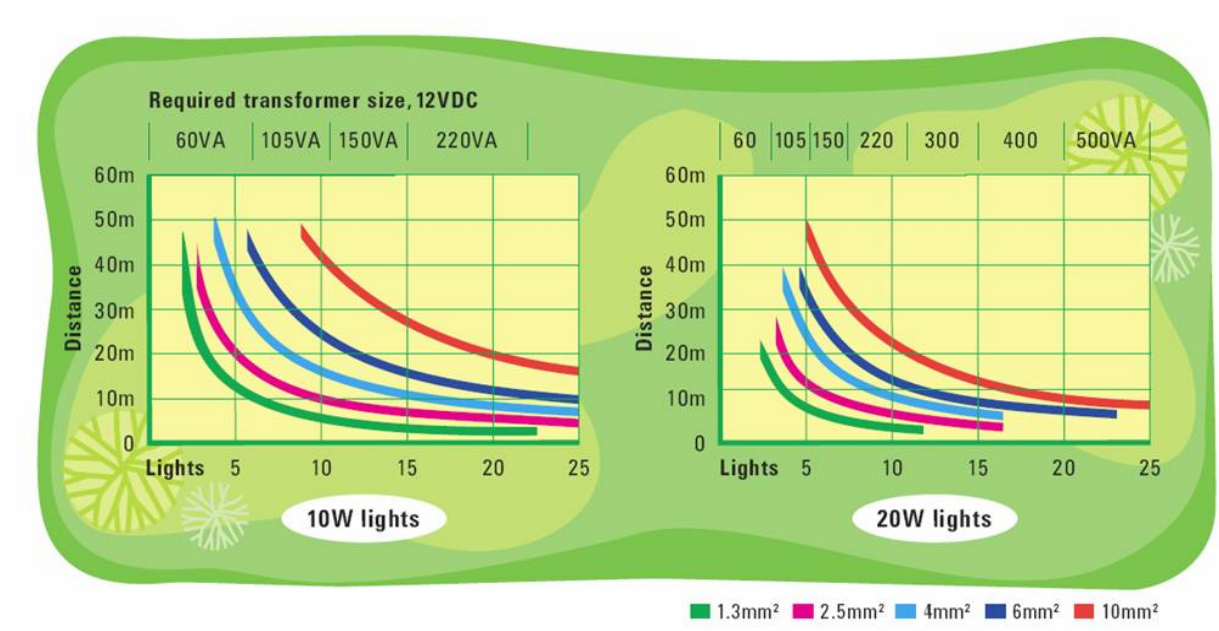

All drawings, designs, specifications, plans and particulars of weights, size and dimensions contained in the technical or commercial documentation of Nexans is indicative only and shall not be binding on Nexans or be treated as constituting a representation on the part of Nexans.