

Product data sheet

Specifications



Switched socket, PDL Iconic complete device, outdoor, with timer, 10A, white

PDLO394CS-XW

Main

Range	PDL Iconic
Product or component type	Switched socket
Device presentation	Complete product
Number of Switched socket	1
Colour tint	Extra white
Connections - terminals	Screw terminals
Technology type	Zigbee
Memory description	Backup memory
Memory usage	Date and time Program

Complementary

Installation direction	Horizontal
Device mounting	Surface
Number of Switch	1
Rated current	10 A
[Ue] rated operational voltage	230/240 V
Outlet poles configuration	2P + E
fixing mode	By screws
Material	PC (polycarbonate)
Clamping connection capacity	3 x 2.5 mm ² 2 x 4 mm ²
Surface finish	Matt
surface treatment	Untreated
Wire stripping length	16 mm
Product weight	190 g

Environment

Ambient air temperature for operation	0...45 °C
---------------------------------------	-----------

Dimensions

Height	85 mm
Width	115.5 mm

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Depth	82 mm
-------	-------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	10.1 cm
Package 1 Width	11.9 cm
Package 1 Length	8.9 cm
Package 1 Weight	332.0 g
Unit Type of Package 2	BB2
Number of Units in Package 2	25
Package 2 Height	33.5 cm
Package 2 Width	26.1 cm
Package 2 Length	45.9 cm
Package 2 Weight	9.3 kg
Unit Type of Package 3	P06
Number of Units in Package 3	300
Package 3 Height	105.0 cm
Package 3 Width	60.0 cm
Package 3 Length	80.0 cm
Package 3 Weight	120.1 kg

Contractual warranty

Warranty (in months)	18
----------------------	----



Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

[Environmental Data explained >](#)

[How we assess product sustainability >](#)



Environmental footprint

Total lifecycle Carbon footprint	21 kg CO2 eq.
Carbon footprint of the manufacturing phase [A1 to A3]	2 kg CO2 eq.
Carbon footprint of the distribution phase [A4]	0 kg CO2 eq.
Carbon footprint of the installation phase [A5]	0 kg CO2 eq.
Carbon footprint of the use phase [B2, B3, B4, B6]	19 kg CO2 eq.
Carbon footprint of the end-of-life phase [C1 to C4]	0.5 kg CO2 eq.
Environmental Disclosure	Product Environmental Profile

Use Better



Materials and Substances

Packaging made with recycled cardboard	Yes
Packaging without single use plastic	Yes
EU RoHS Directive	Compliant By Exemption
REACH Regulation	Reference contains Substances of Very High Concern above the threshold
Halogen-free status	Halogen free product
PVC free	No
Silicone-free	No

Use Longer



Lifetime extension

Repair	No
--------	----

Use Again



Repack and remanufacture



Recyclability potential, in %	11
End of life manual availability	End of Life Information
Take-back	No

Image of product / Alternate images

Alternative





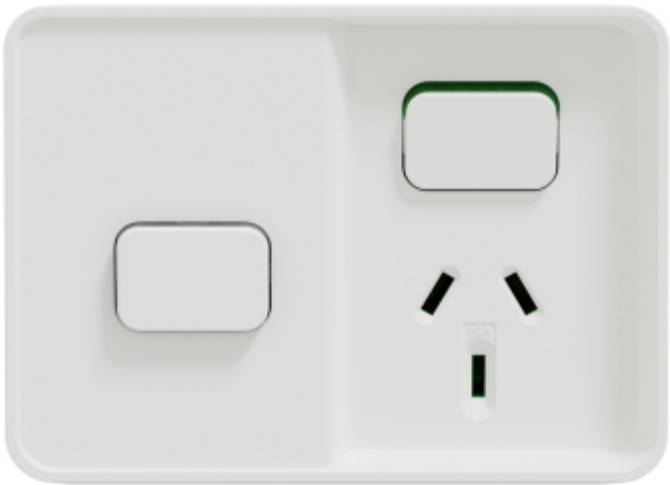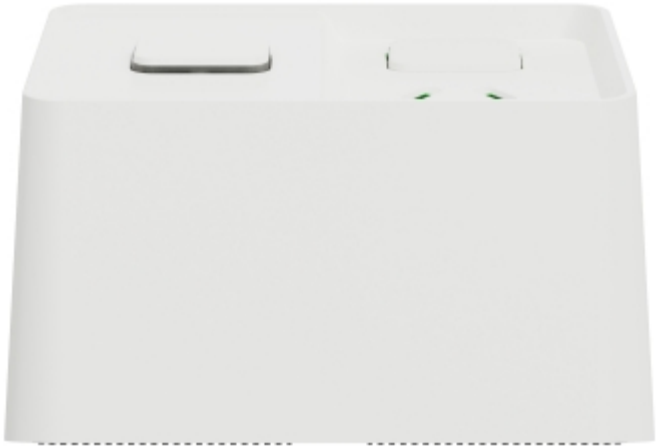

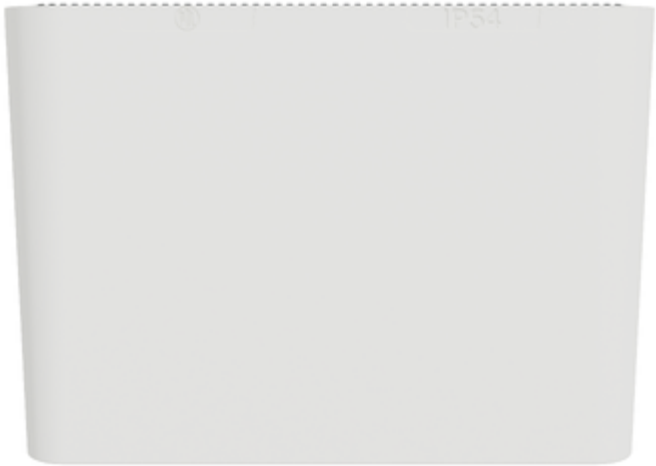


Image of product in real life situation

