

## LED Floodlight

High power LED Floodlight with asymmetrical light distribution - ideal for building facades and footpaths. Compact and streamline design. Climate membrane for automatic climate regulation inside the floodlight. Surge protection up to 10kV. Pre-wired with mains cable (3m). Integrated photocell. Class I electrical, IP66, IK08.

Body: Aluminium die-cast ( < 5% copper )

Bracket: Steel, gray (RAL 9006)

Cover: Tempered glass


Lens: PC

Total power: 150W

Weight: 7,1 kg




TE\_LEO\_F\_150.jpg

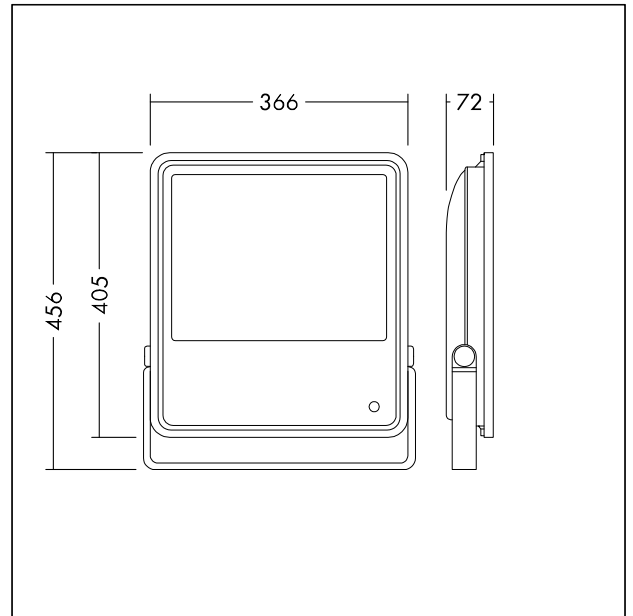

TE\_LEO\_M\_150.wmf

## Light Distribution

## STD - standard

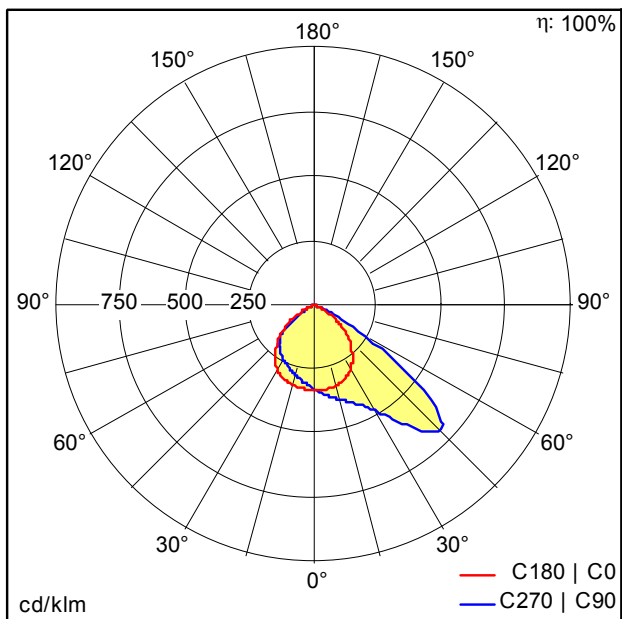

TE\_LEO\_LED\_FL\_IP66\_150W\_840\_PC.Idt

- Light Source: LED
- Luminaire luminous flux\*: 15000 lm
- Luminaire efficacy\*: 100 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature\*: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam)\*: 5
- Rated median useful life\*: 50000h L70 at 25°C
- Ballast: 1x LED\_Con
- Luminaire input power\*: 150 W  $\Lambda = 0.9$