


Compact
INS/INV250 → 630

Extended rotary handle complete
 source changeover assembly
 Commande rotative prolongée
 inverseur monobloc
 Mando rotativo prolongado
 inversor monobloque

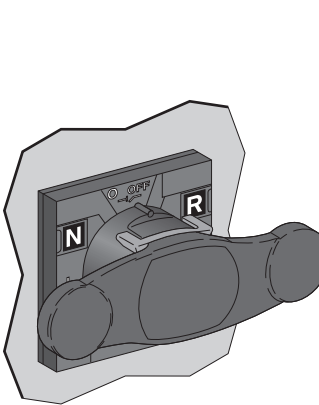

51405705AA-03

Schneider Electric Industries SAS
 35, rue Joseph Monier
 CS 30323
 F - 92506 Rueil Malmaison Cedex

www.schneider-electric.com



© 2013 Schneider Electric.
 All rights reserved.

PLEASE NOTE

- This device must be installed by a qualified electrician.
- We cannot accept any responsibility for failure to follow the instructions provided in this document.

REMARQUE IMPORTANTE


- L'installation de cet appareil doit être effectuée par des professionnels de l'électricité.
- Le non-respect des indications de la présente notice ne saurait engager la responsabilité du constructeur.

TENGA EN CUENTA

- La instalación y mantenimiento de este aparato sólo debe ser realizado por electricistas profesionales.
- El fabricante no se hace responsable en caso de no cumplir con las indicaciones expuestas en este aviso.



commande rotative prolongée frontale
 front extended rotary handle

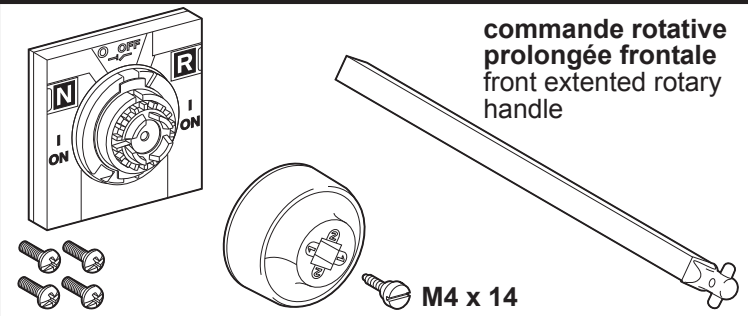


M4 x 14




3

pozidriv n°2, 3
 ou plat / slotted screwdriver

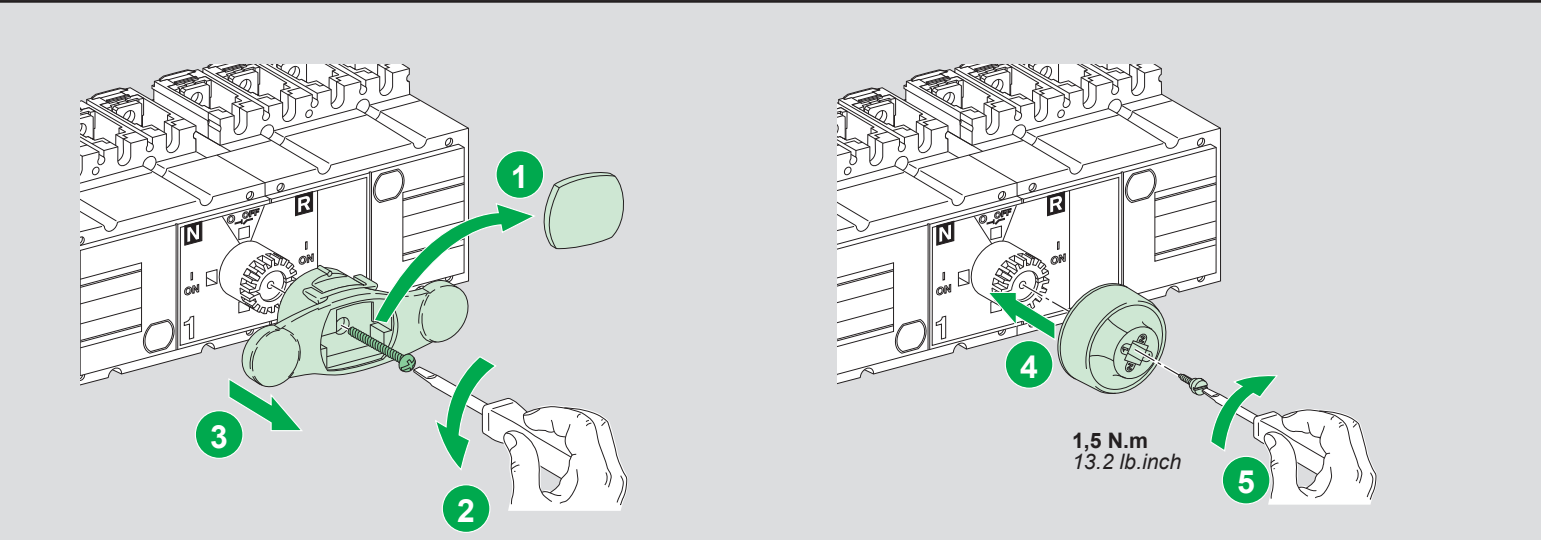

1, 2, 3, 4, 5

1,5 N.m
 13.2 lb.inch

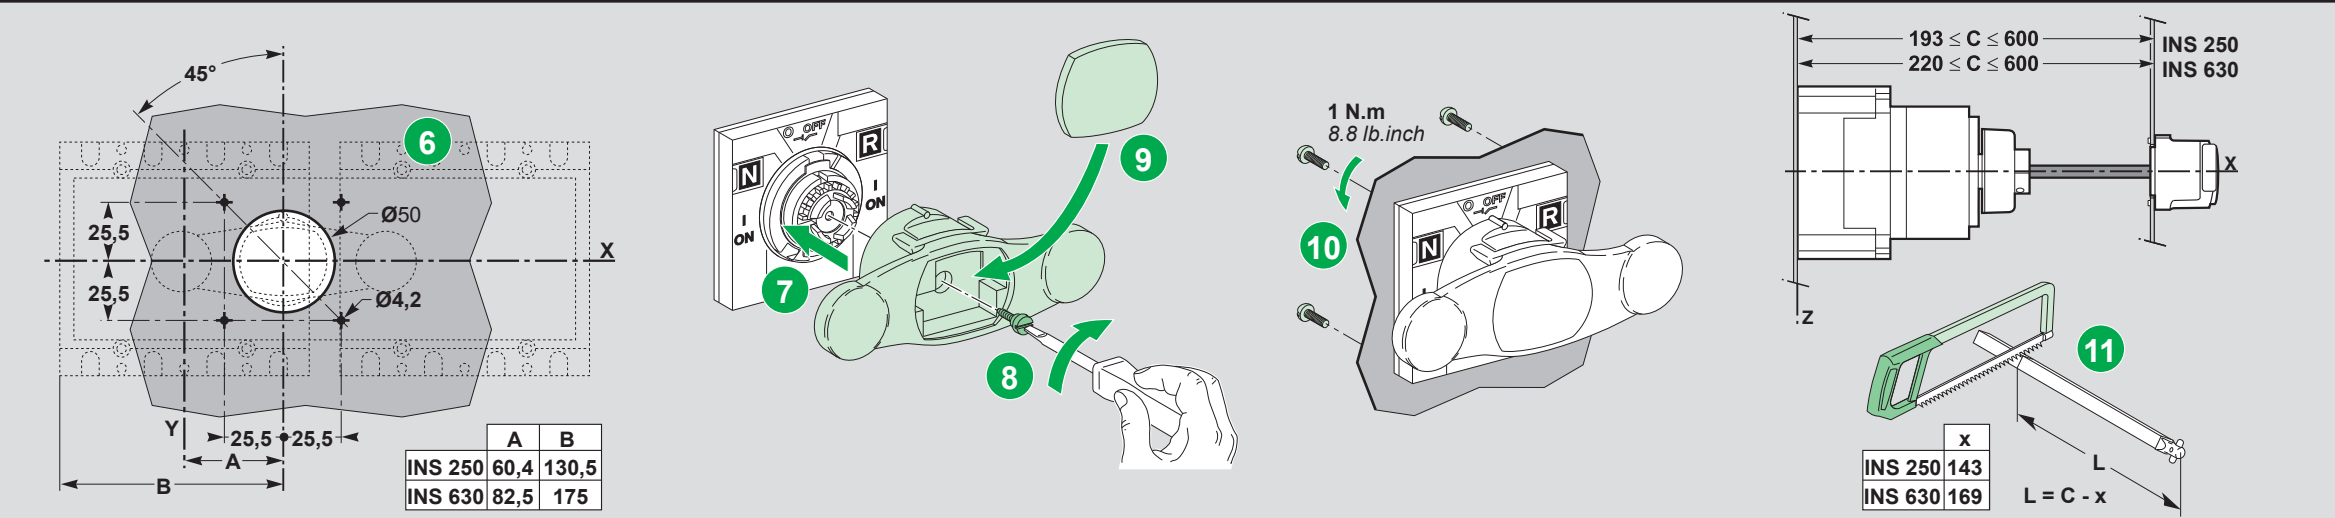

6, 7, 8, 9, 10, 11

1 N.m
 8.8 lb.inch


193 ≤ C ≤ 600
 220 ≤ C ≤ 600

INS 250
 INS 630

	A	B
INS 250	60,4	130,5
INS 630	82,5	175


	x
INS 250	143
INS 630	169

L = C - x

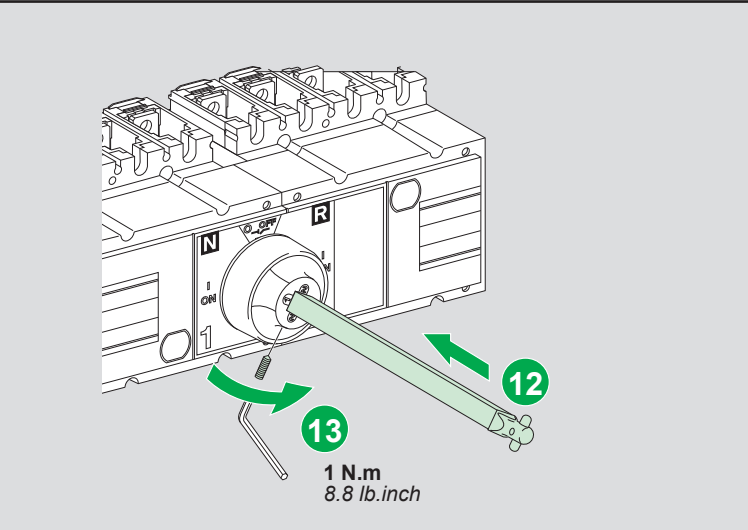

12, 13


1 N.m
 8.8 lb.inch

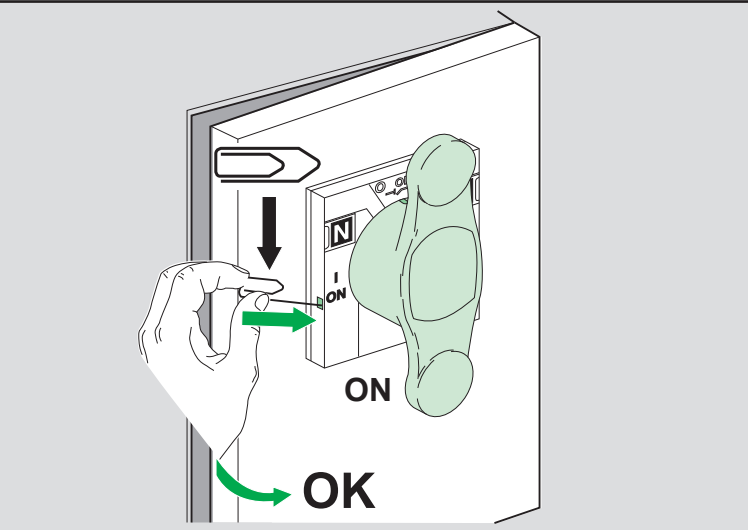

ON

OK


OFF

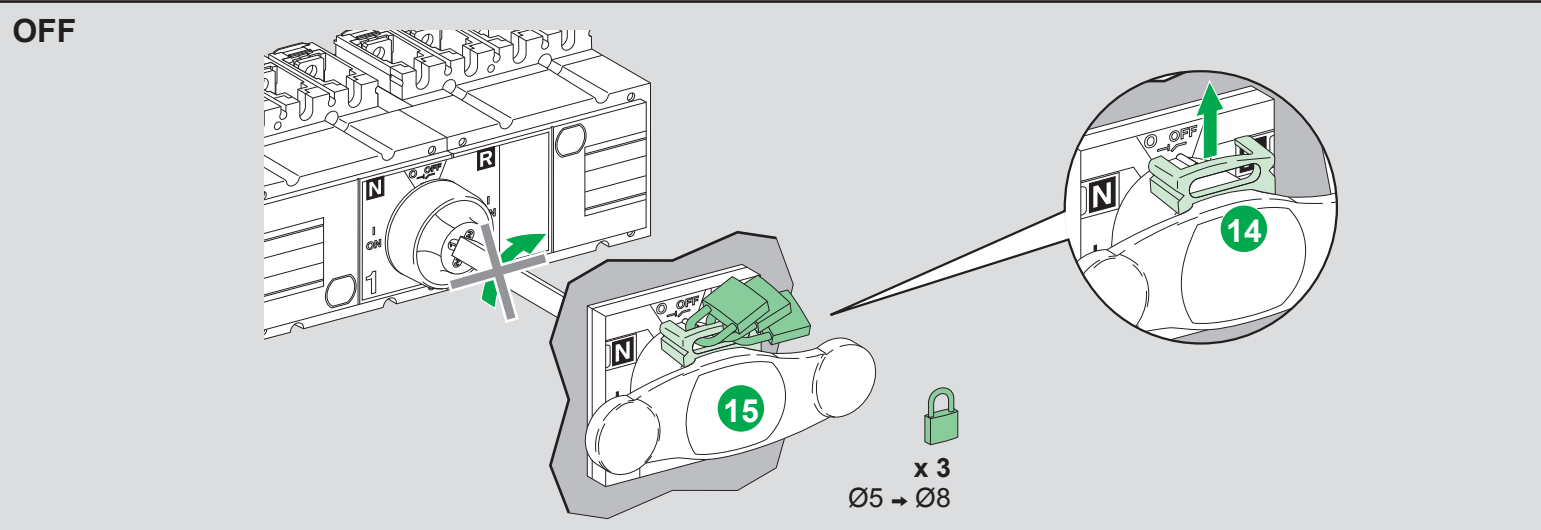

14, 15

x 3
 Ø5 → Ø8

ON/OFF

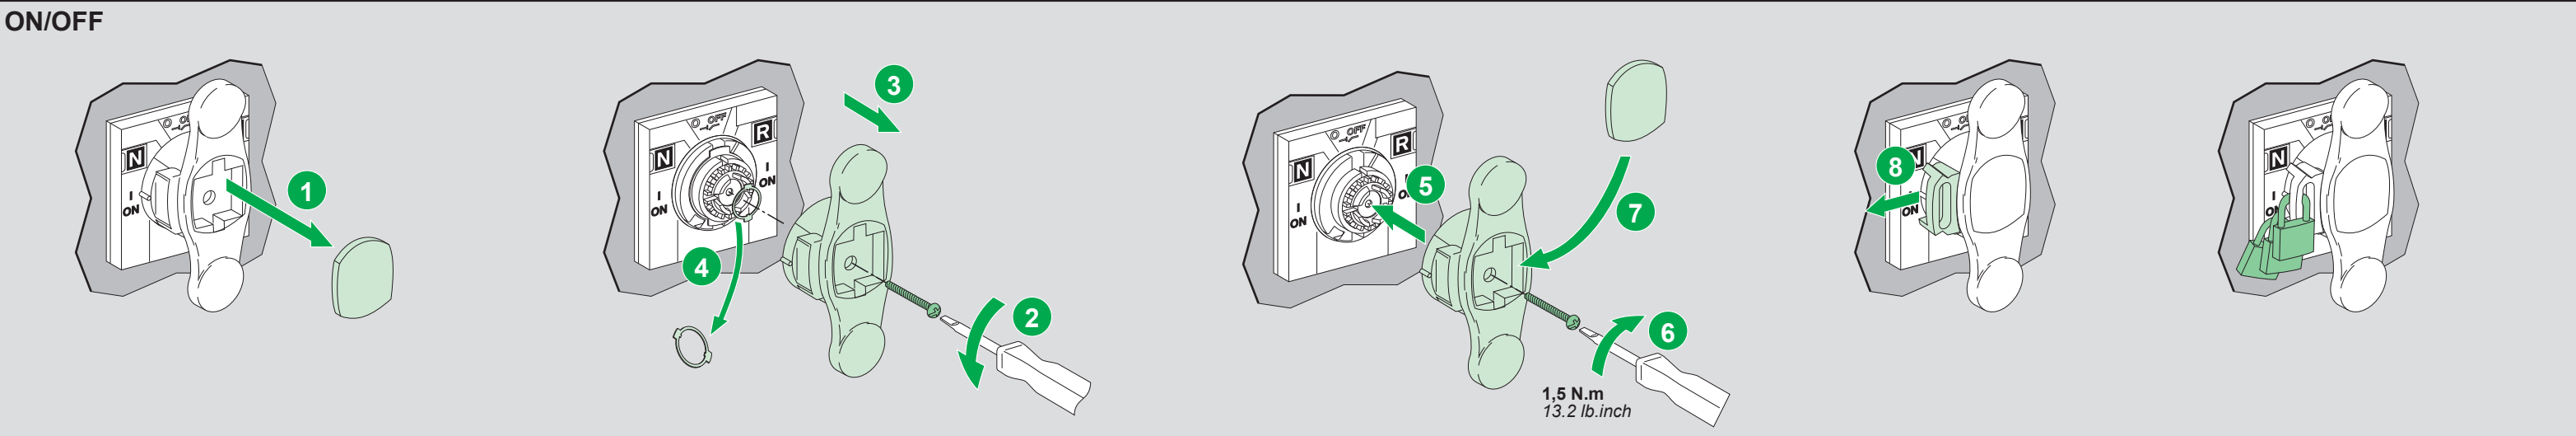

1, 2, 3, 4, 5, 6, 7, 8

1,5 N.m
 13.2 lb.inch