


Product data sheet

Characteristics

SAU25042273

SAU Chassis, Acti9, 250A, 3Ph, 42 poles,
27mm for C120 MCB, top or bottom

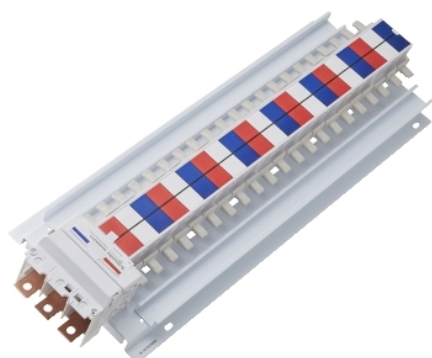

Main

Range	Acti 9
Product or component type	Chassis
Device application	Distribution

Complementary

Range compatibility	Distribution board
Network type	AC
[In] rated current	250 A
Number of ways	1 way (incomer) - 3P
Rated voltage	415 V 50 Hz
Short-circuit withstand	25 kA 0.1 s
[Ui] rated insulation voltage	500 V
[Uimp] rated impulse withstand voltage	6 kV
Number of poles	42
Number of poles	42 x 27 mm
Width	215 mm
Length	569 mm
Busbar pitch	27 mm
Location of connection	Top or bottom

Environment

Standards	AS/NZS 61439
-----------	--------------

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Weight	4.7 kg
Package 1 Height	9.5 cm
Package 1 width	24.5 cm
Package 1 Length	76.1 cm