Product data sheet
Characteristics

SAU400H303DF
SAU Hybrid Chassis, Acti9, 3Ph, 400A, 18mm 24 poles, 27mm 6 Poles for MCB and RCBO,Dual feed

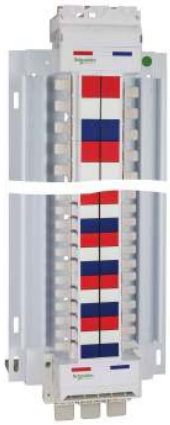

Main

Range	Acti9
Product or component type	Chassis
Device application	Distribution

Complementary

Incomer device	Switch disconnector - 3P MCCB - 3P
Protection device type	Miniature circuit breaker (MCB) as outgoer Residual current circuit breaker with overcurrent protection (RCBO) as outgoer
Network type	AC
[In] rated current	400 A
Number of ways	1 way (incomer) - 3P 1 way (outgoer) - 1P or 3P
Rated voltage	415 V 50 Hz
Short-circuit withstand	25 kA 0.1 s
[Ui] rated insulation voltage	500 V
[Uimp] rated impulse withstand voltage	6 kV
Number of poles	30
Number of poles	24 x 18 mm 6 x 27 mm
Width	245 mm
Length	583 mm
Depth	95 mm
Net weight	3.36 kg
Busbar pitch	18 Mm 27 mm
Location of connection	Dual feed

Environment

Standards	AS/NZS 61439

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Packing Units

Unit Type of Package 1	PCE
Package 1 Length	58.3 cm
Number of Units in Package 1	1
Package 1 Width	24.5 cm
Package 1 Height	9.5 cm
Package 1 Weight	3 kg

Offer Sustainability

REACh Regulation	REACh Declaration
EU RoHS Directive	Not applicable, out of EU RoHS legal scope