


## Product data sheet

### Characteristics

# SAU400H423DF

SAU Hybrid Chassis, Acti9, 3Ph, 400A,  
18mm 30 poles, 27mm 12 Poles for MCB and  
RCBO, Dual feed

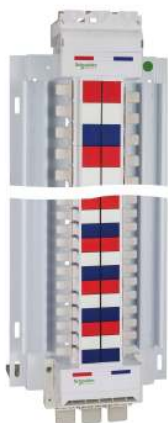

### Main

|                           |              |
|---------------------------|--------------|
| Range                     | Acti9        |
| Product or component type | Chassis      |
| Device application        | Distribution |

### Complementary

|                                        |                                                                                                                              |
|----------------------------------------|------------------------------------------------------------------------------------------------------------------------------|
| Incomer device                         | Switch disconnecter - 3P<br>MCCB - 3P                                                                                        |
| Protection device type                 | Miniature circuit breaker (MCB) as outgoer<br>Residual current circuit breaker with overcurrent protection (RCBO) as outgoer |
| Network type                           | AC                                                                                                                           |
| [In] rated current                     | 400 A                                                                                                                        |
| Number of ways                         | 1 way (incomer) - 3P<br>1 way (outgoer) - 1P or 3P                                                                           |
| Rated voltage                          | 415 V 50 Hz                                                                                                                  |
| Short-circuit withstand                | 25 kA 0.1 s                                                                                                                  |
| [Ui] rated insulation voltage          | 500 V                                                                                                                        |
| [Uimp] rated impulse withstand voltage | 6 kV                                                                                                                         |
| Number of poles                        | 42                                                                                                                           |
| Number of poles                        | 30 x 18 mm<br>12 x 27 mm                                                                                                     |
| Width                                  | 245 mm                                                                                                                       |
| Length                                 | 718 mm                                                                                                                       |
| Depth                                  | 95 mm                                                                                                                        |
| Net weight                             | 4.56 kg                                                                                                                      |
| Busbar pitch                           | 18 Mm<br>27 mm                                                                                                               |
| Location of connection                 | Dual feed                                                                                                                    |

### Environment

|           |              |
|-----------|--------------|
| Standards | AS/NZS 61439 |
|-----------|--------------|

Packing Units

|                              |         |
|------------------------------|---------|
| Unit Type of Package 1       | PCE     |
| Package 1 Length             | 71.8 cm |
| Number of Units in Package 1 | 1       |
| Package 1 Width              | 24.5 cm |
| Package 1 Height             | 9.5 cm  |
| Package 1 Weight             | 4 kg    |

Offer Sustainability

|                   |                                                                                                                     |
|-------------------|---------------------------------------------------------------------------------------------------------------------|
| REACH Regulation  |  <a href="#">REACH Declaration</a> |
| EU RoHS Directive | Not applicable, out of EU RoHS legal scope                                                                          |