Product End-of-Life Instructions

KWH METER EN40 series & iEM2000 series

Product Range
KWH METER EN40 series & iEM2000 series

Marketing Model
EN40P, EN40, EN'clic, iEM2010, iEM2000, iEM2000T

Size (mm):
H x L x D: 68 x 18 x 85
Weigth in kg (or g):
Between 72 and 78 g

Schneider Electric

Operations recommended for the end of life treatment

There are several steps to process the products at the end of life so as to recover components, materials or energy:

Reuse ⇨ Depollution ⇨ Dismantling ⇨ Shredding

The components of the products that maximazise the end of life performances by using the special waste treatment are listed, identified and located hereunder.

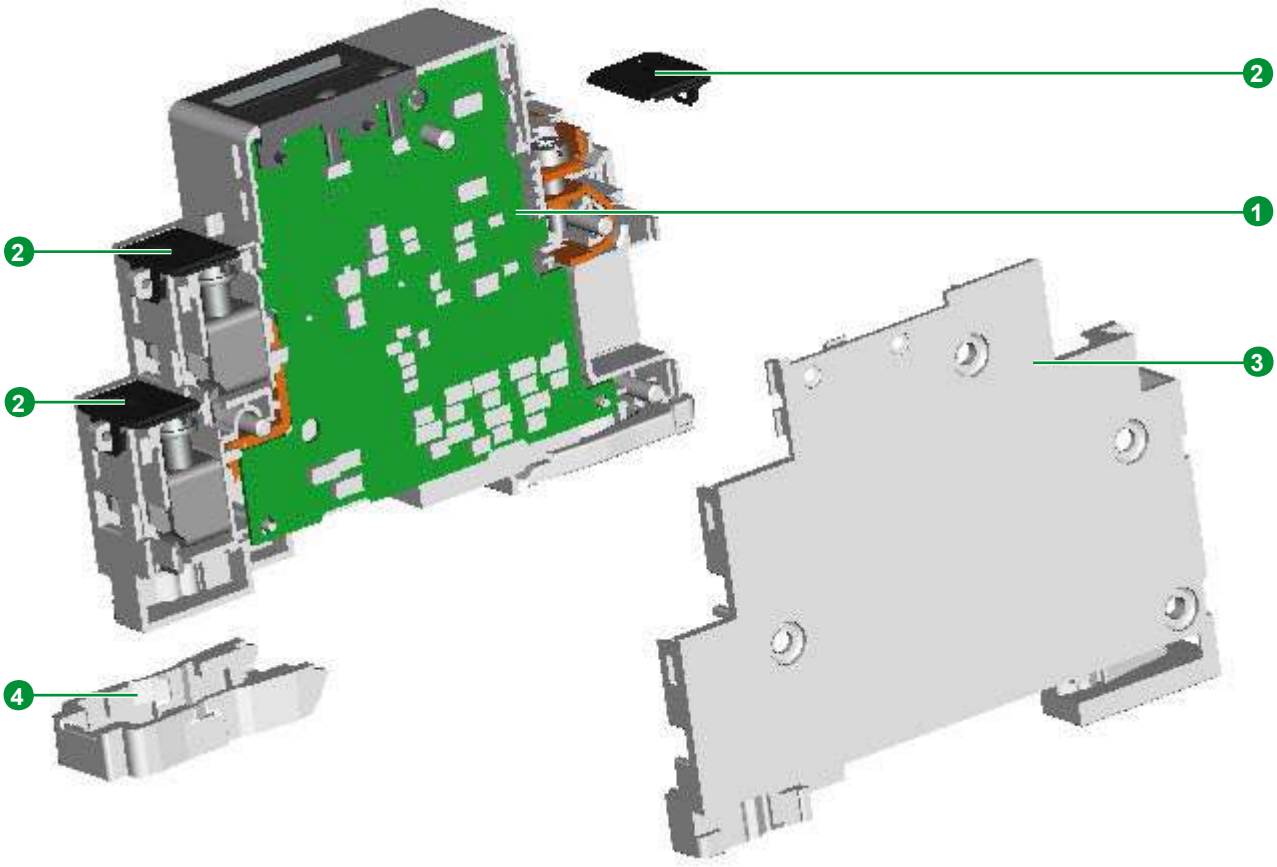

Number on drawing	Components	Weight (g)	Comment
Components listed for special treatment which improves the recycling performances			
1	PCBA PMC 18 mm	24.34 g	Electric Board
2	Sealing	0.299 g each (3 pcs in total)	Brominated Flame Retardant
3	Cover with grey color and with pulsed output	9.122 g	Brominated Flame Retardant
4	Lock interface modbus	1.416 g	Brominated Flame Retardant

Schneider Electric Industries SAS
35, rue Joseph Monier
CS30323
F - 92506 Rueil Malmaison Cedex

RCS Nanterre 954 503 439
Capital social 896 313 776 €
www.schneider-electric.com

The version of the Guide used to create the document: End of Life Instruction Drafting Guide of Schneider Electric version V2.

Publication: Schneider Electric

© 2011 - Schneider Electric - All rights reserved