
# Product data sheet
## Characteristics

# ACTRJSMTG6ANSS
## Actassi - modular jack - category 6A - 10G - FTP - non shuttered

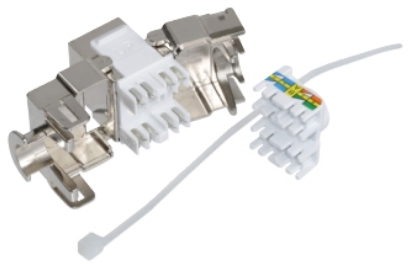

## Main

| | |
|---|---|
| Range | Actassi |
| Product brand | Schneider Electric |
| Product type | Keystone modular jack |
| Provided equipment | Without shutter |
| Colour tint | Metal (zamak) |
| Wiring Colour configuration | TIA-568A/B |
| Type of packing | Plastic bag and carton |
| Quantity per set | Set of 1 |

## Complementary

| | |
|---|---|
| [In] rated current | 1.5 A at 25 °C |
| Voltage proof | 1000 V AC/DC peak, between contacts |
| Contact resistance | 20 mOhm |
| Insulation resistance | >= 500 MOhm |
| Connector type | RJ45 |
| Tool type | Punch down tool<br>Quick termination tool |
| Cable outer diameter | 0.9…1.4 mm |
| Compatible LAN cable types | STP |
| Communication network category | $6_A$ |
| Supported applications | 10GBASE-T |
| Product compatibility | RJ45 plug |
| Type of footprint | S-110 keystone |
| Targeted region | Asia Pacific. |

## Environment

| | |
|---|---|
| Operational temperature range | -10…60 °C |
| Ambient air temperature for storage | -20…70 °C |
| Relative humidity | 0…93 % |
| Climatic category | 40/070/21 (21 days) |
| Flame retardance | UL94-V0 conforming to UL listed |
| Product certifications | FCC part 68 F<br>IEC 60603-7 |
| Standards | ISO/IEC 11081<br>IEC 60603-7<br>ANSI/TIA/EIA-568-B |

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein.
This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications.
It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof.
Neither Schneider Electric Industries SAS nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

## Packing Units

| | |
|---|---|
| Unit Type of Package 1 | PCE |
| Number of Units in Package 1 | 1 |
| Package 1 Weight | 40 g |
| Package 1 Height | 4 mm |
| Package 1 width | 48 mm |
| Package 1 Length | 482 mm |
| Unit Type of Package 2 | CAR |
| Number of Units in Package 2 | 160 |
| Package 2 Weight | 7.104 kg |
| Package 2 Height | 27 cm |
| Package 2 width | 32 cm |
| Package 2 Length | 38 cm |
| Unit Type of Package 3 | P12 |
| Number of Units in Package 3 | 2880 |
| Package 3 Weight | 127.872 kg |
| Package 3 Height | 95 cm |
| Package 3 width | 80 cm |
| Package 3 Length | 120 cm |

## Offer Sustainability

| | |
|---|---|
| Sustainable offer status | Green Premium product |
| REACh Regulation | REACh Declaration |
| REACh free of SVHC | Yes |
| EU RoHS Directive | Compliant EU RoHS Declaration |
| Toxic heavy metal free | Yes |
| Mercury free | Yes |
| RoHS exemption information | Yes |
| China RoHS Regulation | China RoHS Declaration |
| Environmental Disclosure | Product Environmental Profile |

## Contractual warranty

| | |
|---|---|
| Warranty | 18 months |