

DUAL PRESSURE CONTROLS

Type DYS

SAGHO MIYA

GENERAL DESCRIPTION

- Type DYS is dual pressure controls that is integrated with over pressure protection of the high pressure side and control of low pressure side of the refrigeration unit.
- Scale plate with significantly clear visibility
- Compact and light weight

CE mark applicable (available upon request)



TYPE NUMBER SELECTION (SPECIFICATIONS)

Automatic reset type

Unit: MPa {kgf/cm²}

		*1 Catalog No.	Pressure Side	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
				Min.	Max.	*2 Min.	Max.	Off	On			
SG101	DYS-D306X3A	Low Side	-0.06 {-50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.65 {16.5}	Diagram 1	0.40	
		High Side	0.8 {8}	3 {30}	Approx.0.5 fixed. {Approx.5 fixed.}		2 {20}	1.5 {15}	3.3 {33}			
SG141	DYS-D606X3A	Low Side	-0.06 {-50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.65 {16.5}	** Diagram 2		
		High Side	0.8 {8}	3 {30}	Approx.0.5 fixed. {Approx.5 fixed.}		2 {20}	1.5 {15}	3.3 {33}			

Manual reset type

Unit: MPa {kgf/cm²}

		*1 Catalog No.	Pressure Side	Range		Differential		Factory Setting		Max. Working Pressure	Contact Function	Wt. (kg)
				Min.	Max.	*2 Min.	Max.	Off	On			
SG111	DYS-D306X3MA	Low Side	−0.06 {−50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.65 {16.5}	Diagram 3	0.40	
		High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase, and manual reset.		2 {20}	manual reset	3.3 {33}			
SG146	DYS-D606X3MA	Low Side	−0.06{−50cmHg}	0.6 {6}	0.06 {0.6}	0.4 {4}	0.2 {2}	0.3 {3}	1.65 {16.5}	** Diagram 4		
		High Side	0.8 {8}	3 {30}	Automatic operation on pressure increase, and manual reset.		2 {20}	manual reset	3.3 {33}			

• Enclosure: IP20

*1 Standard unit display is MPa. Other unit displays are available upon request by changing "X0" portion of a catalog number.
[X0: MPa, X1: bar, X2: kgf/cm², X3: kPa, X4: lb/in², X5: psi]

*2 Indicates the average value also considering instrumental errors.

**Independent Contacts

ELECTRICAL RATINGS

Rated Voltage (V)		Power Factor (cos ϕ)	125/250V. AC
Rated Amps. (A)			
Non-Inductive Current		1	12
Inductive Current	Full Load	0.75	
	Locked Rotor	0.45	72

Minimum contact capacity: 50mA

CONTACT FUNCTIONS




Diagram 1




Diagram 2




Diagram 3







Diagram 4


L ↓: Operating direction on press. increase at Low Press. Side
H ↑: Operating direction on press. increase at High Press. Side
M ↓: Operating direction on manual reset

DIMENSIONS

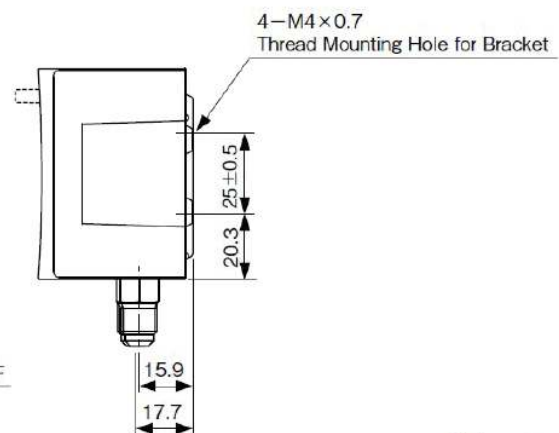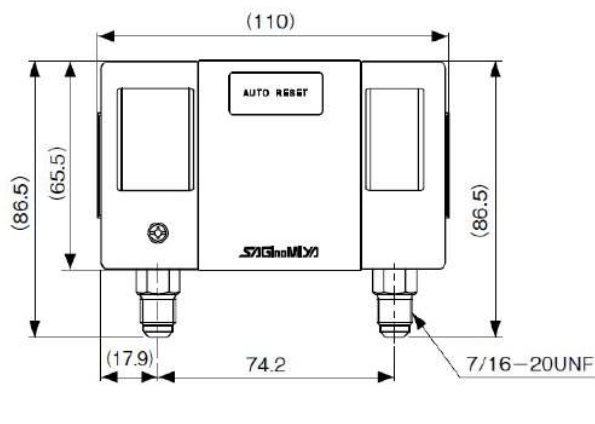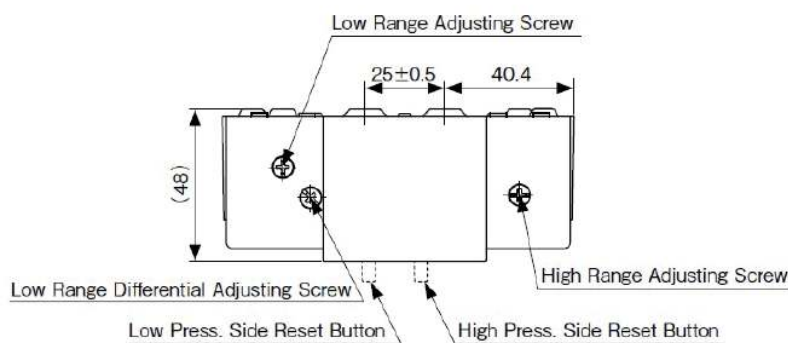

Unit: mm

PRESSURE CONNECTIONS



Standard