


TECHNICAL DATA

SUPREME JET DRY EXECUTIVE II

Automatic Hand Dryer 1.0KW

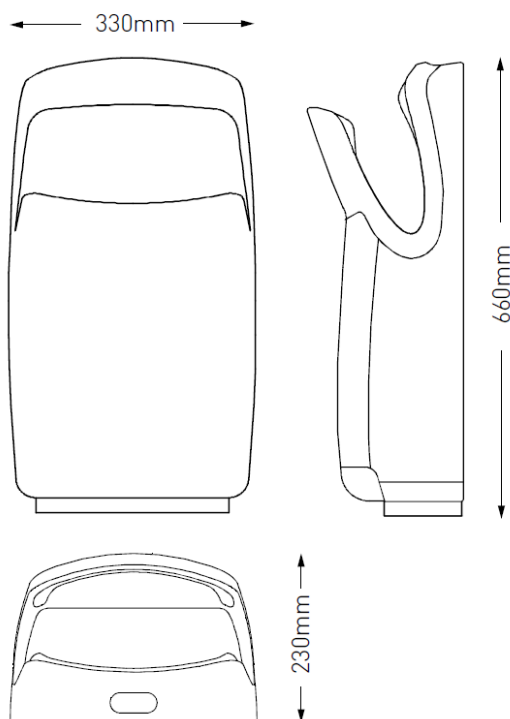

Height recommendations

Recommended height from floor to mounting bracket

Female and Male Washrooms	910mm
Disabled Person's	760mm

MODEL SJD2EXE

Motor	Brushless Electronic Commutated - Two Speed
Sound Levels	75 dBA @ 1m
Power	1000 Watts max
Element	Nil
Rating	4 amps @ 240V AC IP33
Maximum Airflow	155m/sec
Cover	ABS/Polycarbonate antimicrobial impregnated
Dimensions	660H x 330W x 230D mm
Warranty	Supreme 36 month limited warranty
Standards	Complies with New Zealand / Australian standards

SAMPLE SPECIFICATIONS

Supreme Jet Dry Executive II

General

Scope—Supply and install Supreme Jet Dry Executive II automatic hand dryer as shown on the plans.

Materials

Supreme Jet Dry Executive II Hand Dryer made from ABS/Polycarbonate antimicrobial impregnated.

Workmanship

Using the mounting template supplied, position the mounting bracket and affix to the wall using the appropriate fixing for the type of wall.

The electrical connection can be made by fixed wiring of the correct cross section back to an isolating switch in a convenient location all as per local electrical codes of practice.

Hook top of dryer on to mounting bracket and secure the bottom of the machine with a single screw into the wall. The screw position is accessible after removal of the drip tray as per (5) on fixing template.

Liven machine and test operation.

Completion

Leave work clean, remove all trade rubbing from the site and leave the hand dryer cleaned and in working order.

Pass over warranties/manuals. Cleaning and maintenance instructions to the principal.

We reserve the right to alter specifications and design without prior notice



premium washroom products

PO Box 437, Cambridge 3450, New Zealand
Tel: +64 7 823 5790 | Fax: +64 7 823 5792

