
ANNA LED 1200X300 3500 840 FP 96650513

Recessed LED panel

Recessed back-lit LED panel. Lightweight design with low installation depth. High uniformity microprismatic diffuser, UGR<19: gentle, soft and glare-free lighting for office applications. Replaces conventional luminaires with 2 x 36W T8 and offers more than 40% energy saving. Supplied with 2 pin flex & plug (1.2m length). Suitable for recessed mounting in T-bar ceiling grids.
Frame: Aluminium, white finish (RAL 9003). Diffuser: high uniformity PS microprismatic diffuser. Weight: 2.6kg




TE_ANNA_F_1200x300_persp.jpg

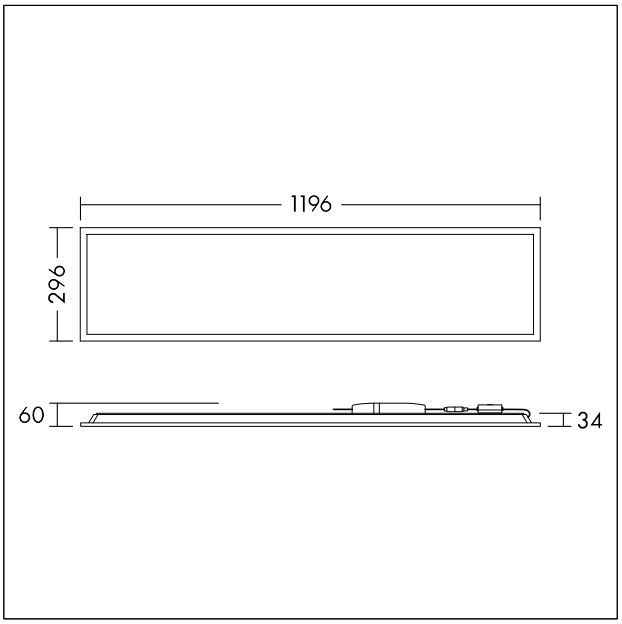

TE_RUBYVARIO_M_1200X300_TC.wmf

Light Distribution STD - standard

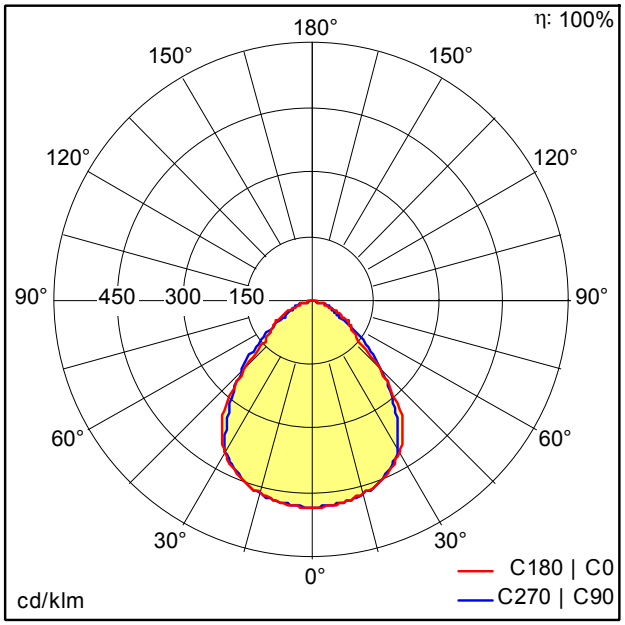

96650513_ANNA_1200X300_3500_840.ldt

- Light Source: LED
- Luminaire luminous flux*: 3618 lm
- Luminaire efficacy*: 101 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature: 4000 Kelvin
- Chromaticity tolerance (initial MacAdam): 5
- Rated median useful life*:
  L80 50000h at 25°C
- Ballast: 1x LED_Con
- Luminaire input power*: 36 W Power factor = 0.9
- Dimming: Fixed output

All values marked with an * are rated values. Luminous flux and connected electrical load are subject to an initial tolerance of +/- 10%. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

RoHS IP20 IP44 IK03 650°C Ta -20 +40

We reserve the right to make technical changes without prior notice. 12.05.2021 © ThornEco