
Henry

VARIO FLEX

Wide Body LED Batten


Ideal for:
Circulation corridors, stairwells, storage facilities, schools and universities

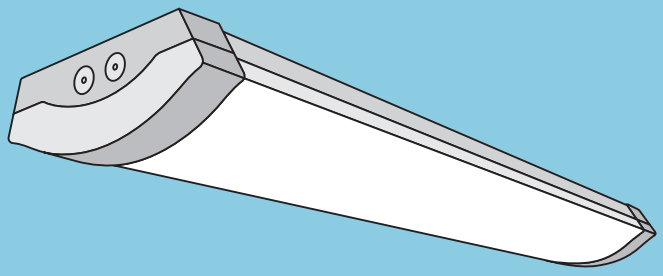

A stylish, curved wide body LED batten with easy and reliable installation design.

VARIO FLEX DALI

- VARIO Feature (Colour Temperature Switch): The ability to choose your colour temperature between cool white (4000 K) or daylight (5700 K), on site, with the flick of a switch
- FLEX Feature (Lumen Output Switch): The flexibility to decide on your lumen package on site with the flick of a switch
- Direct replacement for traditional wide-body battens, matching light output and length for easy upgrades
- Homogeneous illumination
- Energy efficient with 120 - 130 lm/W
- Supplied with Tridonic fixed output or DALI dimmable driver
- 2h Emergency – adapt on-site to an emergency version using the E2 plug&play selftest kit *(Approved AS/NZS2293)*
- Microwave sensor plug&play kit available
- Easy, quick and reliable installation thanks to the hinge structure design for the diffuser fixed to the housing

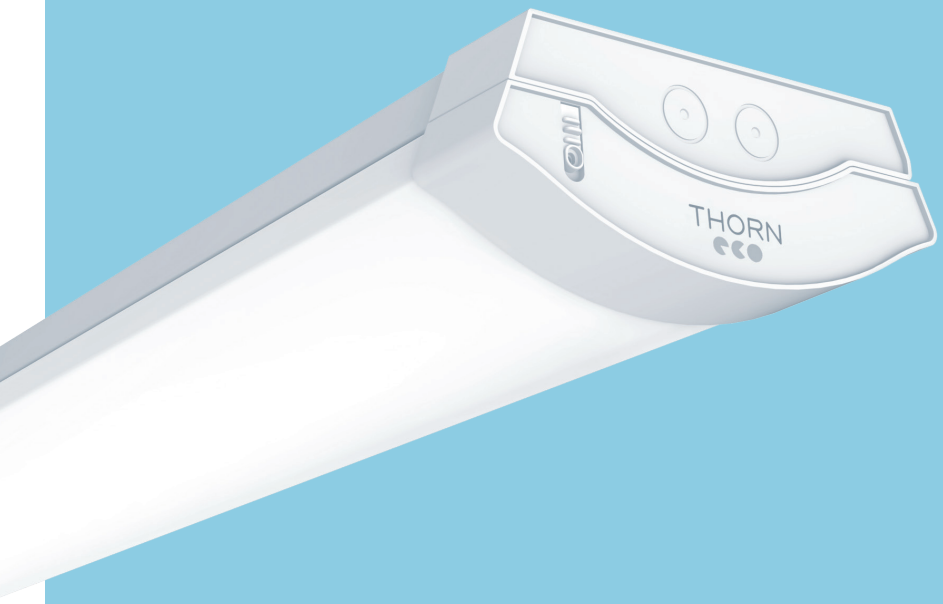



THORN

Specification

Electrical class	I
Ambient operating temperature	-20°C to 40°C for standard, 0°C to 30°C for E2
IP rating	IP20
IK rating	IK06

Installation / Mounting

Mounting	Surface mounting (screws included), suspended (via suspension kit)
Installation	Screw type terminal for reliable electrical connection

Material / Finish

Body	Steel, powder coated white (RAL 9016)
Diffuser	Polycarbonate, reeded opal white
End caps	Polycarbonate, white

Light source information

VARIO (Colour temperature switch)	4000 K, 5700 K
FLEX (Lumen switch)	1200 mm on/off: 4800 lm (39W), 4300 lm (33W), 3300 lm (27W), 2700 lm (21W)
	1500 mm on/off: 6500 lm (50W), 5600 lm (42W), 4600 lm (35W), 3700 lm (28W)
	1200 mm DALI: 4800 lm (39W), 3500 lm (27W)
	1500 mm DALI: 6500 lm (54W), 4400 lm (36W)
Efficiency	120 - 130 lm/W
Lifetime	50 000 hours rated life (@L80B50, Ta 25 °C)
MacAdam (Initial)	5 step

Presence & Daylight sensor

Microwave sensor, presence & daylight sensor

Sensor range

Sensitivity	100%, 75%, 50%,10%
Hold Time	15min, 5min, 90s, 5s
Daylight sensor	50Lux, 10Lux, 2Lux, Disable
Detection Range	Max. installation height: 6m
	Max. detection range: Ø 10m @ 3m installation height
Detection angle	30° – 150°

Ordering Guide

Description	SAP Code
HENRY VARIOFLEX 1200 4800 840/57	22677151
HENRY VARIOFLEX 1500 6500 840/57	22677152
HENRY VARIOFLEX 1200 4800 840/57 DALI	22677153
HENRY VARIOFLEX 1500 6500 840/57 DALI	22677154
Accessories	
HENRY MICROWAVE SENSOR PLUG&PLAY KIT	22677155
HENRY E2 PLUG&PLAY KIT SELFTEST LiFePo4	22677156
HENRY WIRE SUSPENSION KIT 1500	22677157

Dimensions (mm)

L	H	W
1222	82	199
1522	82	199

