ANNA VARIO 1200X300 3500 840/50/57 FP 96652627

Recessed LED panel

LED Panel with opal homogenous light emitting surface. Easy to adjust colour temperature switch located on the luminaire. Comfortable, glare free light with UGR <19 for schools and offices. Total luminous flux: 3500 lm, Luminaire input power: 35W, Luminaire efficacy: 100 lm/W, correlated colour temperature (CCT) adjustable via switch for 4000K, 5000K or 5700K. Lifetime: 50, 000hrs @L80, Colour Rendering: CRI > 80, Chromaticity tolerance (initial MacAdam): 4. Remote driver provided with 2 pin flex & plug for tool-free installation, Suitable for lay-in installation. Dimensions: 1196 x 296 x 33 mm, weight: 1.87 kg.

TE_ANNAVARIOFP_F_1200x300.jpg

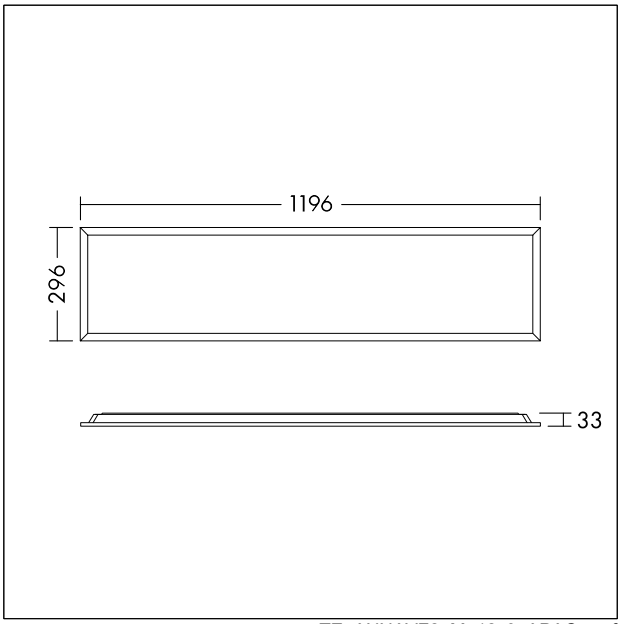

TE_ANNAVF2_M_12x3_APAC.wmf

Light Distribution STD - standard

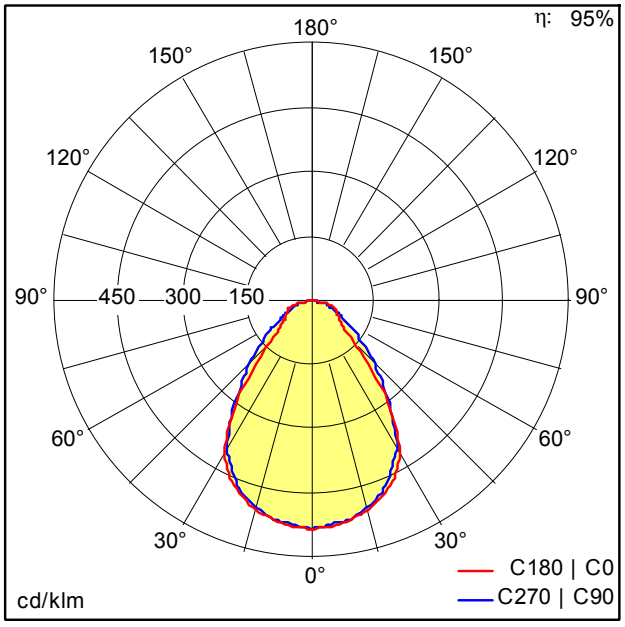

TE_ANNA_VARIO_PAC_1200x300_3500_840.ldt

- Light Source: LED
- Luminaire luminous flux*: 3311 lm
- Luminaire efficacy*: 95 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature*: 4000-5700 Kelvin
- Chromaticity tolerance (initial MacAdam): 4
- Rated median useful life*:
  L80 50000h at 25°C
- Ballast: 1x LED_Con
- Luminaire input power*: 35 W Power factor = 0.9
- Dimming: Fixed output
- Maintenance category CIE 97: D - Enclosed IP2X

All values marked with an * are rated values. Connected electrical load and luminous flux are subject to an initial tolerance of +/- 10%, the most similar colour temperature is subject to an initial tolerance of +/- 150K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.

IEC EN 60598-1 RG 0 | RoHS | IP20 IP44 | IK03 | 850°C | Ta -20 +40

We reserve the right to make technical changes without prior notice. 14.02.2024 © ThornEco