


Recessed LED panel

LED Panel with opal homogenous light emitting surface. Easy to adjust colour temperature switch located on the luminaire. Comfortable, glare free light with UGR <19 for schools and offices. Total luminous flux: 3500 lm, Luminaire input power: 35W, Luminaire efficacy: 100 lm/W, correlated colour temperature (CCT) adjustable via switch for 4000K, 5000K or 5700K. Lifetime: 50,000hrs @L80, Colour Rendering: CRI > 80, Chromaticity tolerance (initial MacAdam): 4. Remote driver provided with 2 pin flex & plug for tool-free installation, Suitable for lay-in installation. Dimensions: 596 x 596 x 33 mm, weight: 1.93 kg.




TE_ANNAVARIOFP_F_600x600.jpg

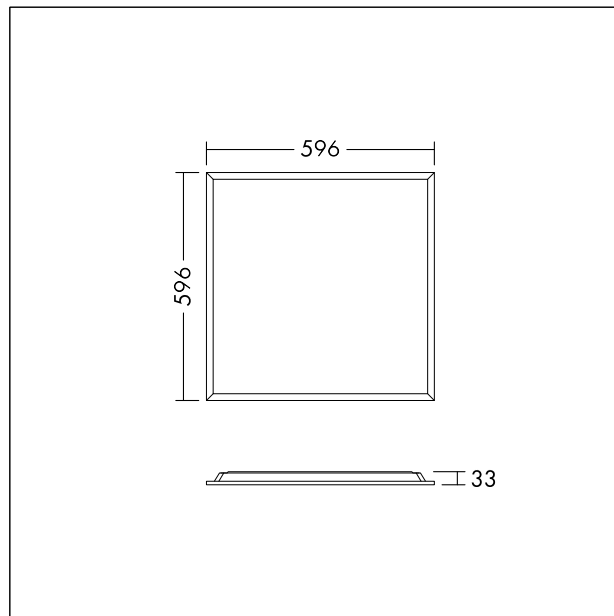

TE_ANNAVF2_M_Q596_APAC.wmf

Light Distribution

STD - standard

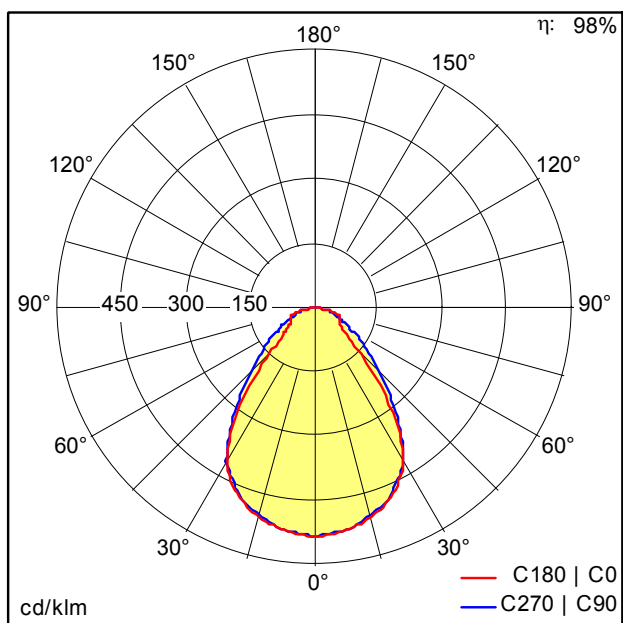

TE_ANNA_VARIO_PAC_600x600_3500_840.ltd

- Light Source: LED
- Luminaire luminous flux*: 3434 lm
- Luminaire efficacy*: 98 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature*: 4000-5700 Kelvin
- Chromaticity tolerance (initial MacAdam): 4
- Rated median useful life*: L80 50000h at 25°C
- Ballast: 1x LED_Con
- Luminaire input power*: 35 W Power factor = 0.9
- Dimming: Fixed output
- Maintenance category CIE 97: D - Enclosed IP2X

All values marked with an * are rated values. Connected electrical load and luminous flux are subject to an initial tolerance of +/- 10%, the most similar colour temperature is subject to an initial tolerance of +/- 150K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.