



IP65 Moisture-proof diffuser luminaire

IP65 LED Moisture proof luminaire with opal diffuser for indoor and covered outdoor installation. Innovative design with long bracket sliders for ease of installation making it an ideal refurbishment luminaire. Made of high quality polycarbonate (UV stabilised) with stainless steel clips. Integrated microwave sensor with corridor function for optional sender - sender wiring. Total luminous flux: 6300 lm, Luminaire input power: 51 W, Luminaire efficacy: 124 lm/W, CCT: 4000K, Lifetime: 50,000hrs @L80, Colour Rendering: CRI > 80. Chromaticity tolerance (initial MacAdam): <6, Impact strength: IK08. Tool-free installation, BESA compatible. Available accessories: Plug&Play Emergency kit for 3 hour emergency conversion (self- and manual test) and suspension kit. Switchable light colour: choose between 4000 K, 5000 K or 6500 K to suit the application. Lumen package adjustable on site by 3 steps (FLEX1: 6300 lm (51W), FLEX2: 5200 lm (41W), FLEX3: 4200 lm (33W)). Detailed power setting information available on www.THORNeco.com. Dimensions: 1532 x 103 x 78 mm, weight: 2.35 kg.

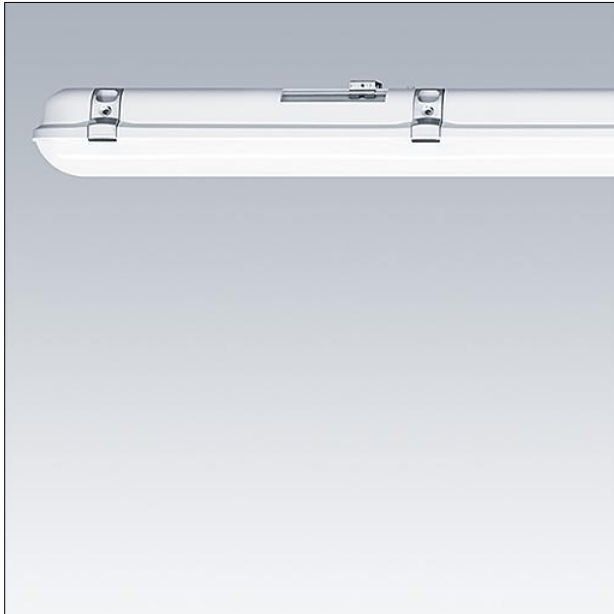


TE_JULIE_F_side.jpg

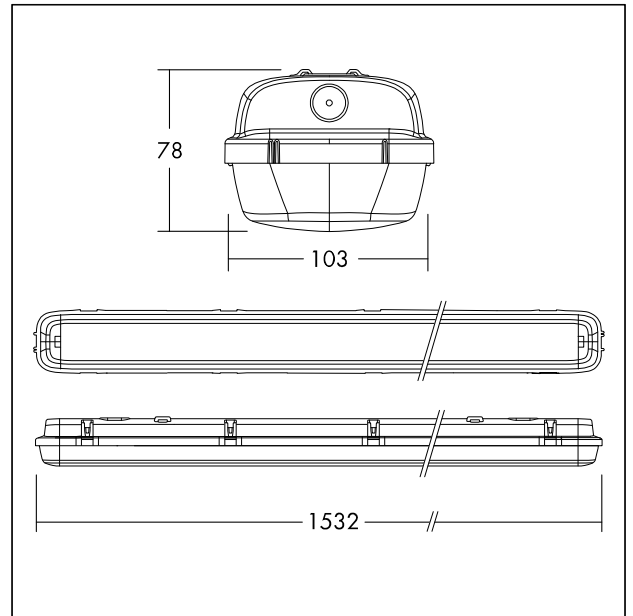

TE_JULIE_M_IILD2_1500_6000lm.wmf

Light Distribution

STD - standard

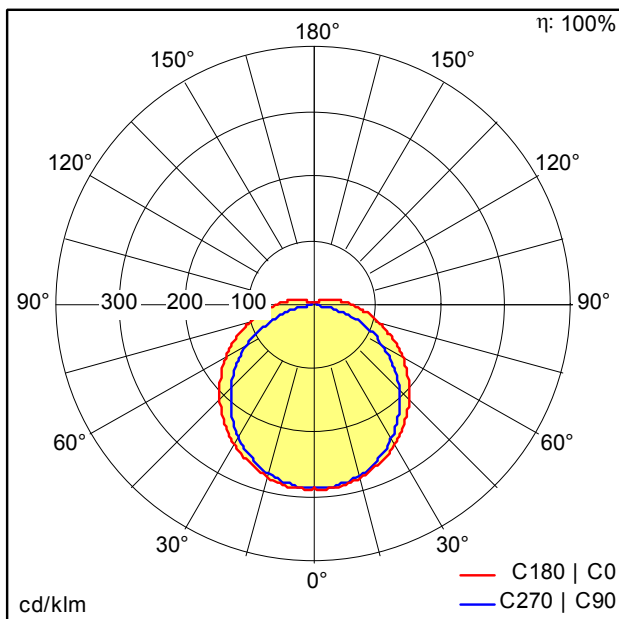

TE_JULIE_VARIOFLEX_PAC_1500_840_FLEX1.ltd

- Light Source: LED
- Luminaire luminous flux*: 6294 lm
- Luminaire efficacy*: 123 lm/W
- Colour Rendering Index min.: 80
- Correlated colour temperature*: 4000-6500 Kelvin
- Chromaticity tolerance (initial MacAdam): 5
- Rated median useful life*: L80 50000h at 25°C
- Ballast: 1x LED_Con
- Luminaire input power*: 51 W Power factor = 0.9
- Dimming: Fixed output
- Maintenance category CIE 97: E - Dust-proof IP5X

All values marked with an * are rated values. Connected electrical load and luminous flux are subject to an initial tolerance of +/- 10%, the most similar colour temperature is subject to an initial tolerance of +/- 150K. Unless stated otherwise, the values apply to an ambient temperature of 25°C.