Product datasheet

Specifications

CLIPSAL

Switch, Iconic, mechanism, with dolly rocker, 1/2-way, momentary, 10A,anthracite

40MBPRL-AN

Main

Range	Iconic
Product or component type	Switch
Device application	Momentary switch
Number of rocker	1
Aesthetic name	Iconic
Switch function	1/2-way
Load type	LEDi lamp 100 W
Colour tint	Anthracite (AN)
Quantity per set	Set of 20

Complementary

Device presentation	Mechanism
Technology type	Electromechanical
Device mounting	Flush
Actuator	Rocker
[Ue] rated operational voltage	250 V
Network type	AC
Rated current	10 A
surface treatment	Untreated
Surface finish	Matt
Connections - terminals	Screw terminals
fixing mode	By clipping locks
Marking	Press
IP degree of protection	IP20
Material	PC (polycarbonate)
Width	23 mm
Height	23 mm
Depth	32 mm
Net weight	16 g

Environment

Ambient air temperature for storage	0…60 °C

Disclaimer: This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications

Relative humidity	10…95 %
Ambient air temperature for operation	0…45 °C

Packing Units

Unit Type of Package 1	PCE
Number of Units in Package 1	1
Package 1 Height	2.3 cm
Package 1 Width	10 cm
Package 1 Length	15 cm
Package 1 Weight	19.15 g
Unit Type of Package 2	BB1
Number of Units in Package 2	20
Package 2 Height	12.95 cm
Package 2 Width	15.2 cm
Package 2 Length	9.5 cm
Package 2 Weight	500 g
Unit Type of Package 3	CAR
Number of Units in Package 3	240
Package 3 Height	33.5 cm
Package 3 Width	26.1 cm
Package 3 Length	33.5 cm
Package 3 Weight	6.43 kg

Environmental Data

Schneider Electric aims to achieve Net Zero status by 2050 through supply chain partnerships, lower impact materials, and circularity via our ongoing “Use Better, Use Longer, Use Again” campaign to extend product lifetimes and recyclability.

Environmental Data explained >

How we assess product sustainability >

Environmental footprint

Total lifecycle Carbon footprint	**0.6 kg CO2 eq.**
Carbon footprint of the manufacturing phase [A1 to A3]	**0.3 kg CO2 eq.**
Carbon footprint of the distribution phase [A4]	**0 kg CO2 eq.**
Carbon footprint of the installation phase [A5]	**0 kg CO2 eq.**
Carbon footprint of the use phase [B2, B3, B4, B6]	**0.3 kg CO2 eq.**
Carbon footprint of the end-of-life phase [C1 to C4]	**0 kg CO2 eq.**
Environmental Disclosure	Product Environmental Profile

Use Better

Materials and Substances

Packaging made with recycled cardboard	**Yes**
Packaging without single use plastic	**No**
EU RoHS Directive	Compliant By Exemption
REACh Regulation	Reference contains Substances of Very High Concern above the threshold

Use Again

Repack and remanufacture

Recyclability potential, in %	**43**
End of life manual availability	**No need of specific recycling operations**
Removable battery	**No**

Image of product / Alternate images

Alternative

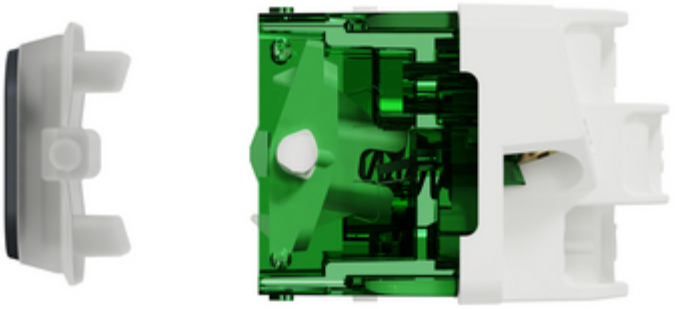

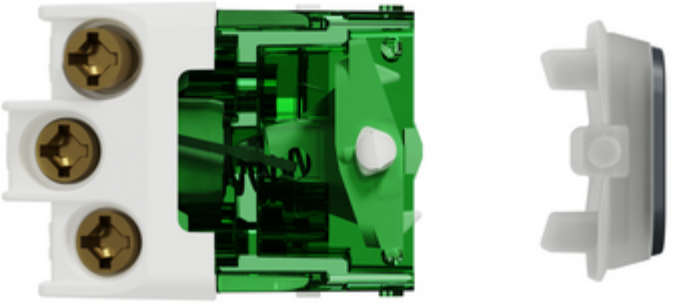

Product datasheet

40MBPRL-AN