Bootlace Pin 2.5mm² Grey





Application

Professional wire-end termination for reliable electrical joints.

Design Specifications


- Material:
- Conductor: Copper Tubular T2/C11000
- Insulation: Nylon
- Treatment: Tin-Plated

Compliance

- UL 486F
- CSA C22.2 No.291-14
- EN 60998-1:2004
- (EU) 2015/863 (RoHS 2.0)
- EN 14362
- IEC 62321

General Information

Part No.	Colour	Section (mm²)	L (mm)	F (mm)	C (mm)	QTY	Packaging Type
HAMBLP250	Grey	2.5	15.0	8.0	2.3	100	Plastic Box

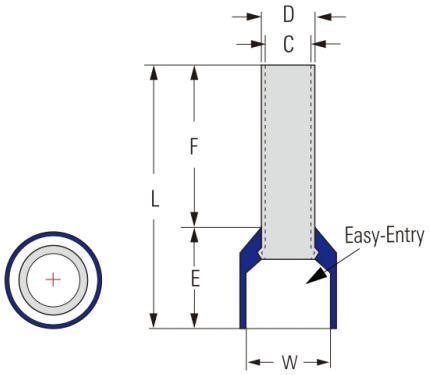

Logistic Information

Individual Packaging



x1

Basic Plastic Box
Heigth (cm): 10.8
Width (cm): 8.1
Depth (cm): 3.6
Net Weigth (kg): 0.016
Gross Weight (kg): 0.056

Inner Box Packaging



x10

Carton Box
Heigth (cm): 19.0
Width (cm): 17.0
Depth (cm): 13.0
Net Weigth (kg): 0.159
Gross Weight (kg): 0.686

Outer Box Packaging



x100

Carton Box
Heigth (cm): 68.0
Width (cm): 36.0
Depth (cm): 21.0
Net Weigth (kg): 1.586
Gross Weight (kg): 7.086