ROBUS®

DOWNLIGHTS

TAYLOR SLIM LED CCT4 SELECTABLE

7W, IP44








PRODUCT INFORMATION DOCUMENT

CONSTRUCTION

- Polycarbonate/ ABS housing
- Polycarbonate opal diffuser
- Spring steel retaining clips with PVC covers
- Prewired with 0.25m flex and push-in connector block

FEATURES

- Low profile body available as flush and recessed trim versions
- Switch on the back of the fitting allows selection between 3000K, 4000K, 5000K and 6500K colour temperature
- Equipped with low flicker driver
- Offers IC-4 Thermal Insulation rating
- Complete with white trim. Black, chrome and brushed chrome trims available as accessories
- Dimming compatible with most TRIAC dimmers (compatibility list available on the website)

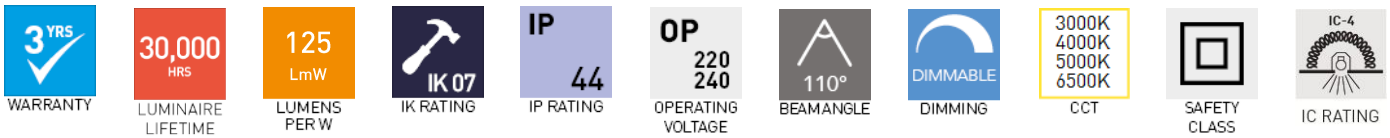

Product Code:	RC7SRCCT4NZ-01
Comparable to:	50W Halogen
Total Power (W):	6.5
Power Factor:	0.9
Total Light Output (lm):	810
Total Emergency Light Output (lm):	NA
Efficacy (lm/cctW):	125
Lux at 1m (lux):	310
Emergency Lux at 1m (lux):	NA
CCT (K):	3000/4000/5000/6500
CRI:	80
SDCM:	<3 for 3000K, 6500K <6 for 4000K, 5000K
UGR:	29.4
IP:	44
Operation Temperature (°C):	-20 ≤ Ta ≤ +40
Inrush Current:	2A/35us
Rated Life to L70B50 (Hrs):	30000
Dimensions ØxH (mm):	110x44.5
Cut out (mm):	92
Weight (kg):	0.19

Product is certified to all the relevant standards.
Please contact our technical department for market specific compliances.

PLEASE NOTE: INFORMATION IN THIS DOCUMENT MAY BE SUBJECT TO CHANGE WITHOUT PRIOR NOTICE

IRE: TEL: +353 1 709 9000 WEB: ROBUS.COM
UK: TEL: 0800 973 220 WEB: ROBUS COM
AUS: TEL: +61 7 3890 5444 WEB: AU.ROBUS.COM
NZ: WEB: NZ.ROBUS.COM

ROBUS®

DOWNLIGHTS

TAYLOR SLIM LED CCT4 SELECTABLE

7W, IP44

Cone Illuminance Diagram

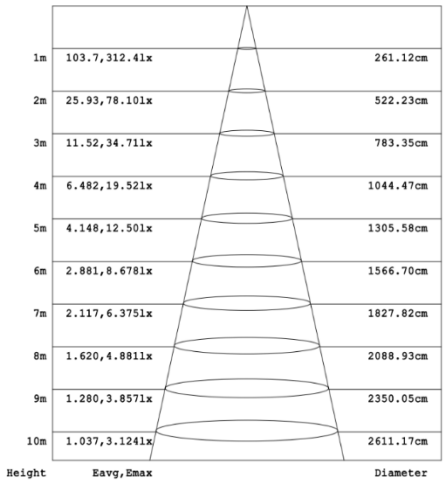


Diagram for RC7SRCCT4NZ-01 in 4000K. Other diagrams available on request

Polar Intensity Diagram



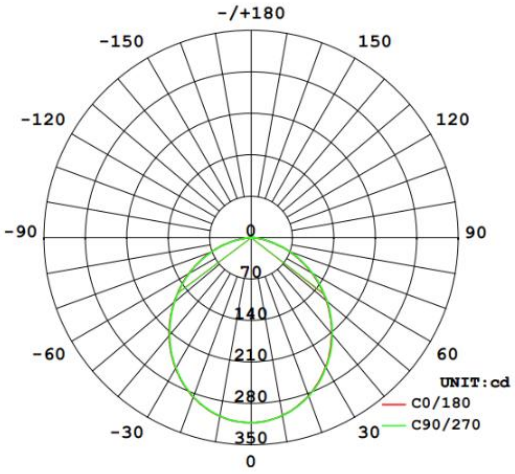


Diagram for RC7SRCCT4NZ-01 in 4000K. Other diagrams available on request

Dimension Diagram

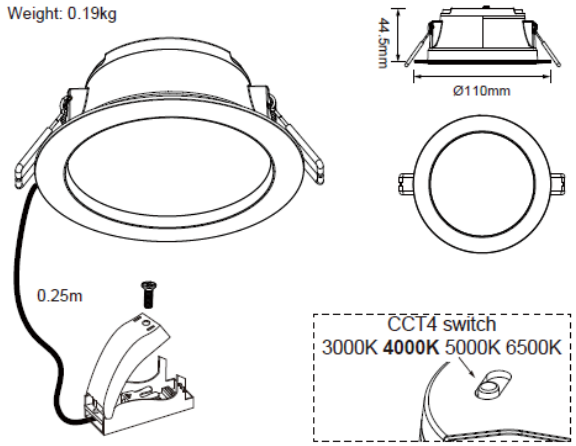

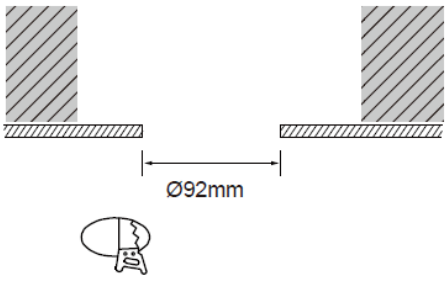

Accessories

RC7SRTRIM-03	TAYLOR SLIM Recessed Trim Chrome
RC7SRTRIM-04	TAYLOR SLIM Recessed Trim Black
RC7SRTRIM-13	TAYLOR SLIM Recessed Trim Brushed Chrome