UNITRCK III GTR302


SINGLE CIRCUIT ADJUSTABLE TRACK SPOT



FEATURES

- Die-cast aluminium body
- Powder coated finish in white or black
- PC diffuser combined with a PMMA lens for smooth and uniform light distribution
- Featuring vertical adjustment of up to 80° and horizontal rotation of 320°
- Built-in constant current LED driver
- Colour matching 3 MacAdam steps
- LED lifespan: 50000 hours @ L80 B10, Ta 25°C
- Ta:-20°Cto +40°C


COLOUR SELECTABLE

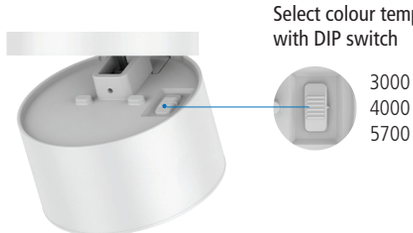


OPTION

- BEAM ANGLE: 20°

DIMENSIONS

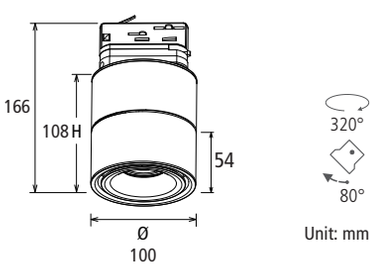

PHOTOMETRIC



GTR302 10W 36°

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W)	OUTPUT CURRENT (mA)	LUMEN (lm)	COLOUR TEMPERATURE (K)	CRI	R9	BEAM ANGLE (°)	FITTING COLOUR	CARTON QUANTITY
GTR302 TC WH	230	10	250	950/1080/1020	3000/4000/5700	>90	6	36	White	24
GTR302 TC BK	230	10	250	950/1080/1020	3000/4000/5700	>90	6	36	Black	24

Specifications above are for reference only and may vary without prior notice