Director 2 Exit Light

General purpose traditional interior exit luminaire, commercial building or retail.

- Wall & Ceiling mount,complete with replaceable lithium iron phosphate (LiFeP04) battery
- Manual test and maintained emergency exit
- Also available in DALI version



IP20	0 to 40	50,000hrs (L70/B50)	3 Years
Ingress Protection Rating	Operating Temperature	Lifetime	Warranty

CODE	SYSTEM POWER	EXIT LUMEN	EFFICACY	DIMENSIONS	CLASSIFICATION
DIRLEDPDSL	4.6W	220lm	48lm/W	L380 x W160 x H220 mm	C0/C180: D10 & C90/C270: D10
DIRLEDPSSL	4.6W	220lm	48lm/W	L380 x W110 x H160 mm	C0:D6.3C90/C270:D5

EMERGENCY MODE WATTAGE	EMERGENCY MODE LUMEN	OPTION	BATTERY CAPACITY	TESTING SYSTEM	VIEWING DISTANCE
4.6W	48lm	Maintained	1500mA	Self Test	24m

ACCESSORY CODE	DESCRIPTION
BATPK1500/1L11	LiFePO4, battery pack 1 CELL3.2V 1500mAh

AS/NZS 2293.1:2018 Classification Table


ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLAN (M)	
	C0/180	C90/C270
2.1	7.8	8.5
2.4	8	8.8
2.7	8.1	8.9

DIRLEDPDSL


ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLAN (M)			
	C0	C90	C180	C270
2.1	3.7	4.1	0	4.1
2.4	0	4.1	0	4.1
2.7	0	0	0	0

DIRLEDPSSL

Line Drawings

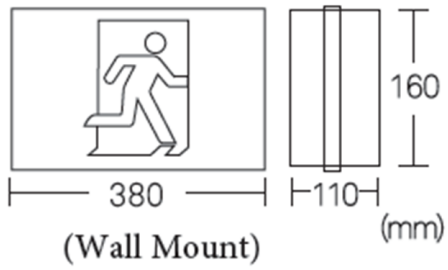

DIRLEDPSSL

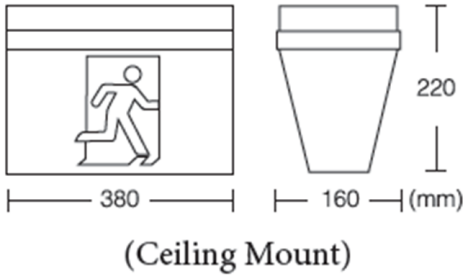

DIRLEDPDSL

Product Images



DIRLEDPSSL

*Rated LED design life where stated is based upon application of Pierlite's operating and maintenance guidelines; see pierlite.com.au. Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification. Gerard Lighting Pty Ltd standard Terms and Conditions apply

Pierlite is a registered trademark of
Gerard Lighting Pty Ltd @Copyright Pierlite 2020