Pathfinder 2 Emergency Light

The Pathfinder 2 LED Emergency Light is a high performance, energy efficient luminaire providing omnidirectional coverage in applications such as office spaces, correctional facilities, fire passages, retail centres, aged care and hospitality. Products and accessories, including DALI 2 compliant, Interact Ready options

- Recessed mount with an optional surface mount kit (white and black versions)
- Replaceable Lithium Iron Phosphate (LiFeP04) battery
- Flex and plug included for easy installation



IP20	0 to 40	50,000hrs (L70/B50)	4 Years
Ingress Protection Rating	Operating Temperature	Lifetime	Warranty

CODE	SYSTEM POWER	DIMENSIONS	LUMINAIRE COLOUR	INRUSH CURRENT	LINE CURRENT	CLASSIFICATION
PFDLED-RL2	6W	L140 x W140 x H32 mm	White	15A	50A	C0/C180:D80 & C90/C270 : D80
PFDLED-RL2-D40	6W	L140 x W140 x H32 mm	White	15A	50A	C0/C180:D40 & C90/C270:D40
PFDLED-RLIA	6W	L140 x W140 x H32 mm	White	15A	50A	C0/C180:D40 & C90/C270:D40
PFLED-RL2	6W	L140 x W140 x H32 mm	White	10A	30A	C0/C180:D80 & C90/C270 : D80
PFLED-RLBK2	6W	L140 x W140 x H30 mm	Black	10A	30A	C0/C180:D80 & C90/C270 : D80

OPTION	BATTERY	BATTERY CHARGE
Non Maintained	LiFePO4	2hr


ACCESSORY CODE	DESCRIPTION
PFSKIT-L2	PATHFINDER 2 D80 SURFACEKIT WHITE
PFSKIT-LBK2	PATHFINDER 2 D80 SURFACEKIT BLACK
FFLEDVK	FFLEDVK CEIL MNT VANDAL KIT
BATPK1500/3L3T	Battery pack to be use for PFDLED-RL2
DGLCEM3200/2L12	Battery LiFePO4 2Cell 6.4V 3200mAh (2HR)


PIERLITE®


AS/NZS 2293.1:2018 Classification Table

ALLOWABLE LUMINAIRE MOUNTING HEIGHT (M)	LUMINAIRE MAXIMUM SPACING FOR EACH PLAN (M)		
	C0	C90/C270	C180
2.1	11.5	11.5	11.5
2.4	13.2	13.2	13.2
2.7	14.8	14.8	14.8
3	16.5	16.5	16.5
3.3	18.1	18.1	18.1
3.6	19.8	19.8	19.8
4	22	22	22
4.5	24.7	24.7	24.7
5	27.5	27.5	27.5
6	28.9	28.9	28.9
7	30	30	30
8	30.9	30.9	30.9
9	31.5	31.5	31.5
10	32.1	32.1	32.1
15	35.5	35.5	35.5
20	36.9	36.9	36.9

Line Drawings

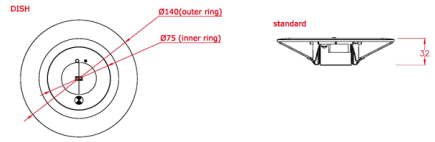



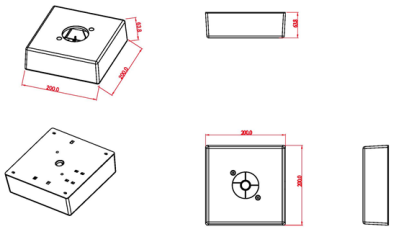

Product Images



PFLED-RL2




PFLED-RL2



PFLED-RLBK2



PFLED-RLBK2

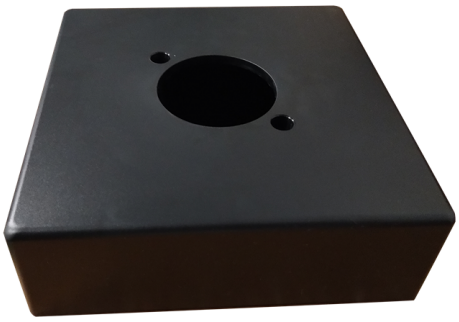


PFLED-RLBK2

Accessories



PFSKIT-L2

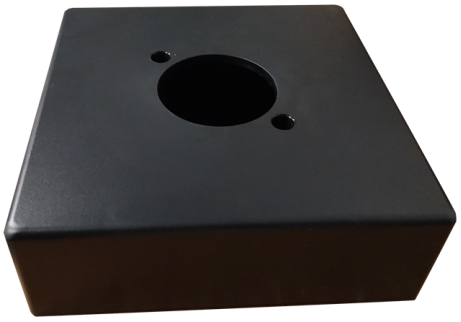

PFSKIT-LBK2

*Rated LED design life where stated is based upon application of Pierlite's operating and maintenance guidelines; see pierlite.com.au. Actual product life may vary dependent upon frequency of maintenance and product application. Due to continual product improvement, information is subject to change without notification. Gerard Lighting Pty Ltd standard Terms and Conditions apply

PM 8:08:58 2026-11-02

Pierlite is a registered trademark of
Gerard Lighting Pty Ltd @Copyright Pierlite 2020