
Luna VARIO

LED Bulkhead

Ideal for:
Circulation corridors, stairwells, sanitary rooms and breakout areas

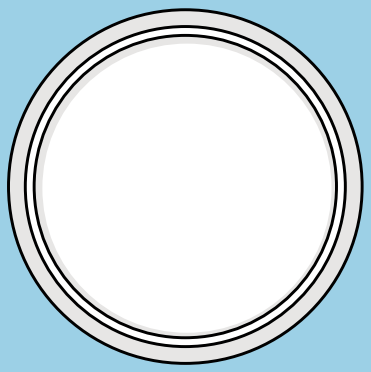

Ultra slim, integrated edge lit LED bulkhead provides harmonious light for indoor application

VARIO

IP54

IK03

- VARIO Feature (Colour Temperature Switch): The ability to choose three different colour temperature on site with the flick of a switch
- Modern slimline design
- Ceiling mount or wall mount options
- UV Stabilised Polycarbonate body and diffuser
- Phase cut dimmable
- 50 000 hours lifetime



THORNeco

Specification

Electrical class	II
Ambient operating temperature	-20°C - +40°C

Installation / Mounting

Mounting	Ceiling and wall
Installation	Cable entry from back pre-knocked out, Standard surface

Material / Finish

Body	Polycarbonate White
Diffuser	Polycarbonate Opal


Light source information

Colour temperature Switchable light colour		3000 K, 4000 K, 5700 K
Lumen	250mm	1100 lm (12W)
	300mm	2100 lm (18W)
	300mm	2900 lm (25W)
Efficiency		Up to 117 lm/W
Lifetime		50 000 hours rated life (@L80B50, Ta 25 °C)
Macadam (Initial)		6 step

Ordering Guide

Description	SAP Code
LUNA VARIO 250 1100 830/40/57 WH DIM	22679656
LUNA VARIO 300 2100 830/40/57 WH DIM	22679657
LUNA VARIO 400 2900 830/40/57 WH DIM	22679658

Dimensions (mm)

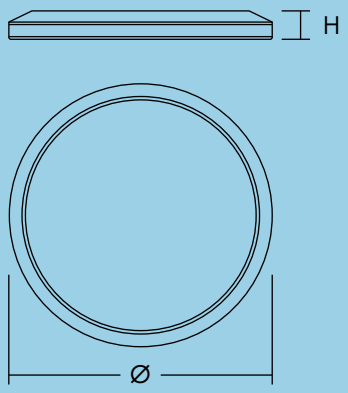

	Ø	H
LUNA VARIO 250	250	27
LUNA VARIO 300	300	27
LUNA VARIO 400	400	27