
Jewel VARIO

LED Bulkhead

Ideal for:
Circulation corridors, public entrance areas, stairwells, sanitary rooms and underpasses

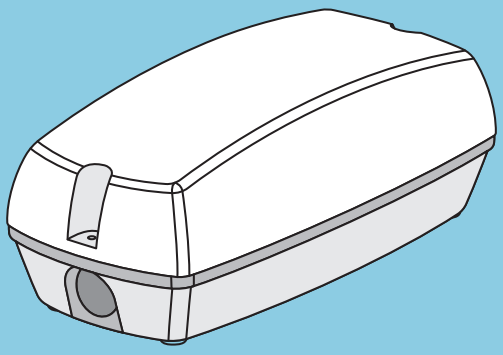

Surface mounted IP65 LED luminaire, compact size with smooth lines

VARIO IP65 IK10

- VARIO Feature (Colour Temperature Switch): The ability to choose three different colour temperature on site with the flick of a switch
- Compact size with smooth lines
- Robust construction up to IK10 impact resistance
- Centered or end-capped cable entry point for easy installation
- UV Stabilised Polycarbonate body and diffuser
- Replaceable light engine and driver extend the life of the product
- 50 000 hours lifetime



THORNeco

Specification

Electrical class	II
Ambient operating temperature	-20°C - +40°C

Installation / Mounting

Mounting	Suitable for wall or ceiling mounting. Quick and easy installation.
Installation	Rear or end cable entry

Material / Finish

Body	UV Stabilised Polycarbonate
Diffuser	UV Stabilised Polycarbonate


Light source information

Colour temperature Switchable light colour	3000 K, 4000 K, 5700 K
Lumen	1000 lm (10W)
Efficiency	100 lm/W
Lifetime	50 000 hours rated life (@L80B50, Ta 25 °C)
Macadam (Initial)	5 step

Ordering Guide

Description	SAP Code
JEWEL VARIO 1000 830/40/57 OP WH TC	22679659
JEWEL VARIO 1000 830/40/57 OP BK TC	22679660

Dimensions (mm)

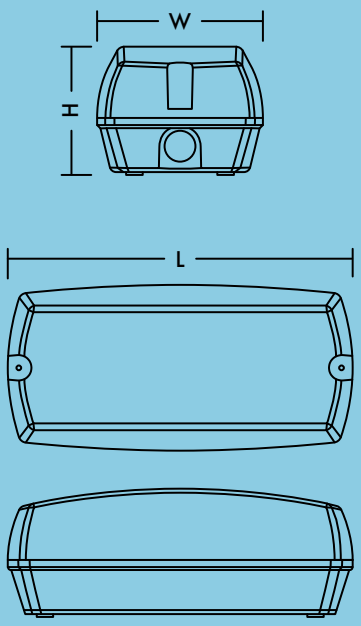

W	H	L
117	111	238