

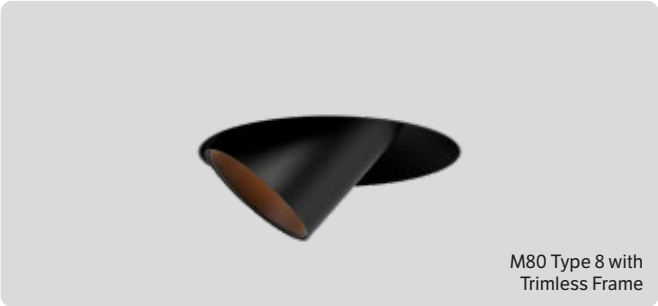

M80 Type 8 with
Trimless Frame

M80-T8 Type 8 - Dark Art Adjustable Scopic

Watts 11W / 300mA DC **Lumens** <870lm

Beam 24˚, 36˚ or 55˚ **Tilt** 40˚ **Rotate** 355˚

Specifications

CCT	2700K, 3000K or 4000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.

Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

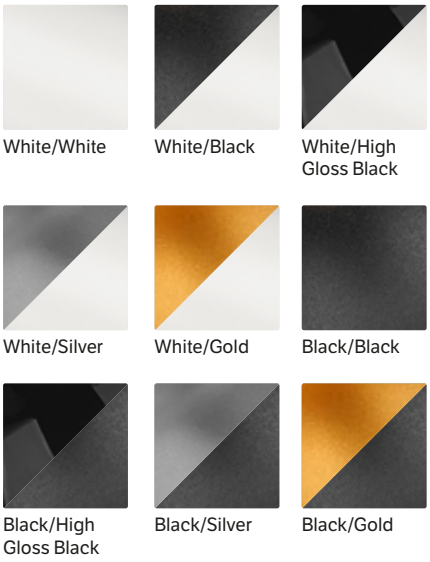

Dimensions



M80-T8

Step 1: Choose Installation Frame

See pages 204-205 for frame details







	Recessed Round	Recessed Oval Double	Recessed Square	Recessed Rectangular Double	Trimless
Dimensions	Ø102 x H62mm	L192 x W102 x H62mm	L102 x W102 x H62mm	L192 x W102 x H62mm	Ø170 x H68mm
Cut Out	Ø95mm	2x 95mm @ 90mm centres	Ø95mm	2x 95mm @ 90mm centres	Ø130mm
White Code	F80-RR-W	F80-RR2-W	F80-RSQ-W	F80-RSQ2-W	F80-TL-R
Black Code	F80-RR-B	F80-RR2-B	F80-RSQ-B	F80-RSQ2-B	-

Step 2: Choose Module Type

Model	- Type	- Trim/Body Colour	Reflector Colour	CCT	- Beam
M80	- T8	- W (White), B (Black)	W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	27K (2700K), 3K (3000K), 4K (4000K)	- 24D, 36D, 55D

Step 3: Select your Driver

	Phase-cut Dimmable	Dali	Casambi
M80-T8	DCC300A-DX-12W-GL	DCC150700-DDM-612W @ 300mA	DCC150500-CAS-712W @ 300mA

Configuration Example: For a Recessed Single M80-T8 Dark Art Adjustable Spot in White with a Silver Reflector and a Phase-cut Dimmable Driver, the following three components must be ordered. (1) Recessed Frame: F80-RR-W (2) Light Module: M80-T8-WS3K-36D (3) Dimmable Driver: DCC300A-DX-12W-GL.



F80-RR Recessed Round

Dimensions Ø102 x H62mm
Cut Out Ø95mm
White Code F80-RR-W
Black Code F80-RR-B



F80-RR2 Recessed Oval Double

Dimensions L192 x W102 x H62mm
Cut Out 2x 95mm @ 90mm centres
White Code F80-RR2-W
Black Code F80-RR2-B



F80-RSQ Recessed Square

Dimensions L102 x W102 x H62mm
Cut Out Ø95mm
White Code F80-RSQ-W
Black Code F80-RSQ-B



F80-RSQ2 Recessed Rectangular Double

Dimensions L192 x W102 x H62mm
Cut Out 2x 95mm @ 90mm centres
White Code F80-RSQ2-W
Black Code F80-RSQ2-B



SF80-RR Surface Cylinder

Dimensions Ø106 x H146mm

White Code SF80-RR-W

Black Code SF80-RR-B



F80-TL-R Trimless

Dimensions Ø170 x H68mm

Cut Out Ø130mm

Code F80-TL-R