



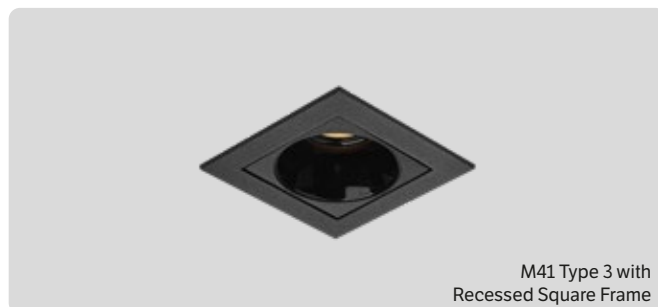
M41-T3

Type 3 - Dark Art Square Fixed

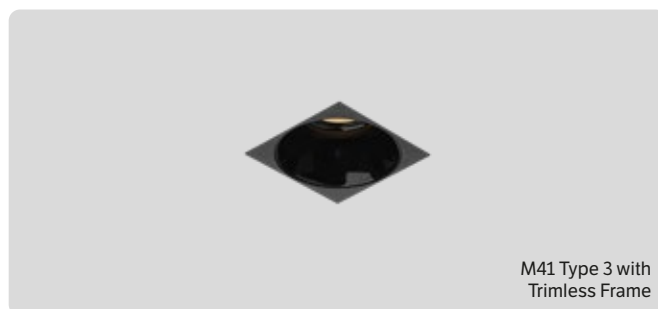
Watts 3.6W / 120mA

Lumens 370lm

Beam 36°



M41 Type 3 with
Recessed Square Frame



M41 Type 3 with
Trimless Frame



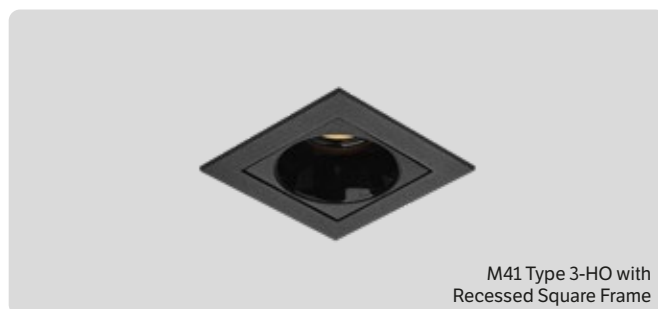
M41-T3-HO

Type 3-HO - Dark Art Square Fixed High Output

Watts 6.5W / 200mA

Lumens <600lm

Beam 36°



M41 Type 3-HO with
Recessed Square Frame

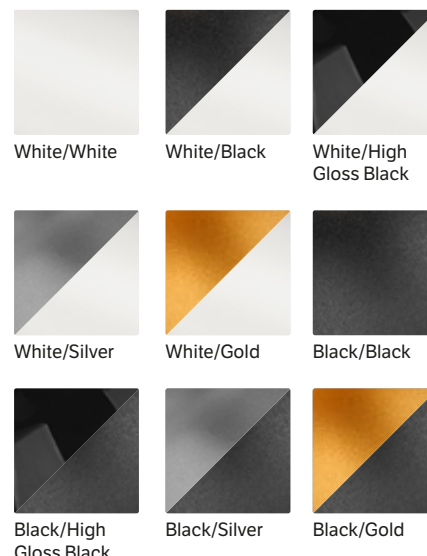
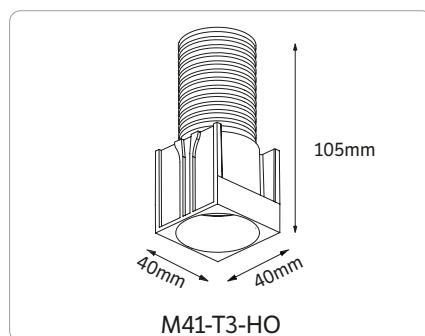
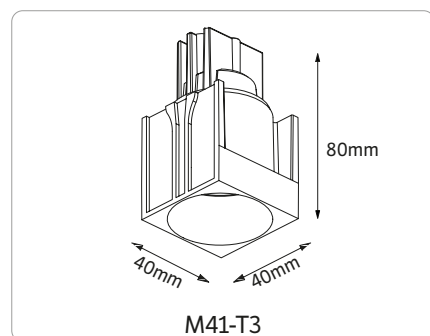


M41 Type 3-HO with
Trimless Frame




**Specifications**

CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.





Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

**Dimensions****Step 1: Choose Installation Frame**

See pages 140-141 for frame details

**Recessed Square****Recessed Rectangular Double****Recessed Rectangular Triple****Recessed Rectangular Quad**

Dimensions	L60 x W60 x H60mm	L101 x W60 x H60mm	L142 x W60 x H60mm	L184 x W60 x H60mm
Cut Out	L54 x W54mm	L95 x W54mm	L136 x W54mm	L178 x W54mm
White Code	F41-SQ-W	F41-SQ2-W	F41-SQ3-W	F41-SQ4-W
Black Code	F41-SQ-B	F41-SQ2-B	F41-SQ3-B	F41-SQ4-B

**Trimless Square****Trimless Rectangular Double****Trimless Rectangular Triple****Trimless Rectangular Quad**

Dimensions	L93 x W53 x H50mm	L134 x W53 x H50mm	L175 x W53 x H50mm	L216 x W53 x H50mm
Cut Out	L56 x W54mm	L97 x W54mm	L138 x W54mm	L179 x W54mm
White Code	F41-TL-SQ-W	F41-TL-SQ2-W	F41-TL-SQ3-W	F41-TL-SQ4-W
Black Code	F41-TL-SQ-B	F41-TL-SQ2-B	F41-TL-SQ3-B	F41-TL-SQ4-B

Step 2: Choose Module Type

Model	Type	Trim/Body Colour	Reflector Colour	CCT	Beam
M41	T3	W (White), B (Black)	W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	3K	- 36D
M41	T3-HO	W (White), B (Black)	W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	3K	- 36D

Step 3: Select your Driver

	TRIAC Dimmable	Dali	Casambi
M41-T3	DCC120200-DMS-5W8W @ 120mA	-	-
M41-T3-HO	DCC120200-DMS-5W8W @ 200mA	DCC150700-DDM-612W @ 200mA	DCC150500-CAS-712W @ 180mA (does not fit through cutout, ceiling access required)

Configuration Example: For a Trimless Single M41-T3 Dark Art Square Fixed in White with a Silver Reflector and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Trimless Frame: F41-TL-SQ-W (2) Light Module: M41-T3-WS3K-36D (3) Dimmable Driver: DCC120200-DMS-5W8W.