



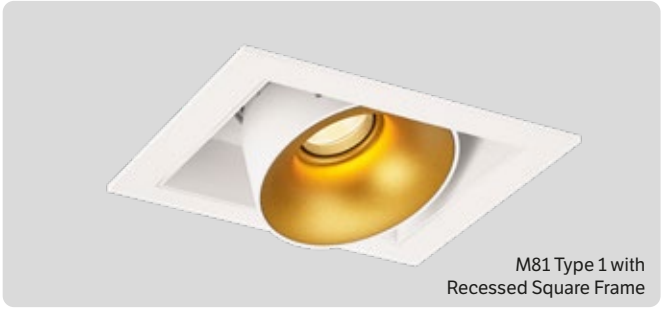

M81 Type 1 with
Recessed Square Frame

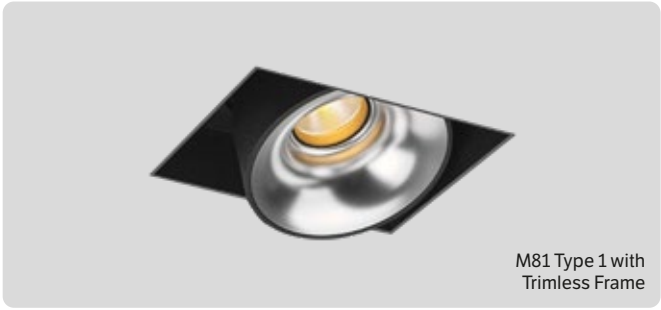


M81 Type 1 with
Trimless Frame

M81-T1 Type 1 - Dark Art Square Adjustable


Watts 9W / 260mA DC **Lumens** <750lm

Beam 45° **Tilt/Rotate** 25°/355°



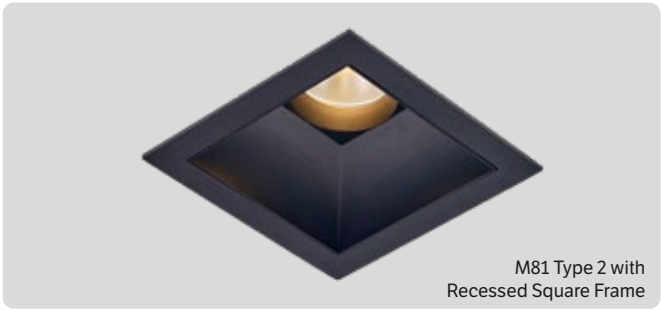

M81 Type 2 with
Recessed Square Frame

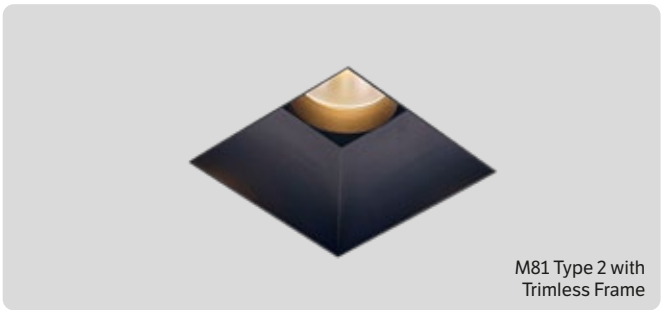

M81 Type 2 with
Trimless Frame

M81-T2 Type 2 - Lotus Square Fixed


Watts 12W / 350mA DC **Lumens** <1050lm

Beam 40°


Specifications

CCT	3000K
Binning	SDCM 2
Lifespan	105,000hrs (L90 B10)
UGR	Suitable for installations requiring UGR of less than 19.


Material	Aluminium
CRI	97
IP Rating	IP43
Classification	IC Rated
Driver	Sold separately
Warranty	5 Year Warranty

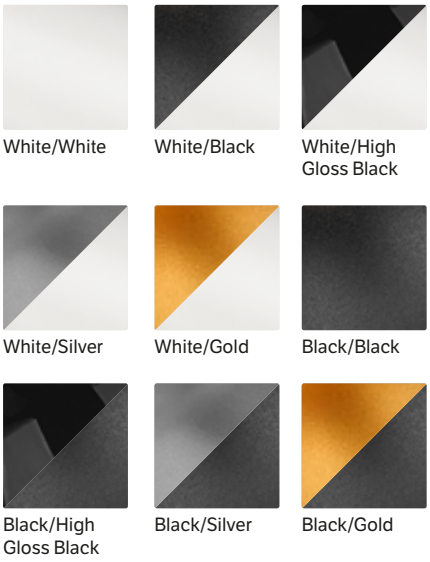

Dimensions





M81-T1





M81-T2

Step 1: Choose Installation Frame

See pages 208-209 for frame details

	Recessed Square	Recessed Rectangular Double	Trimless Square	Trimless Rectangular Double	Surface Square Box
Dimensions	L102 x W102 x H70mm	L181 x W102 x H70mm	L170 x W170 x H68mm	L216 x W93 x H70mm	L98 x W98 x H148mm
Cut Out	95 x 95mm	173 x 95mm	130 x 130mm	177 x 94mm	-
White Code	F81-SQ-W	F81-SQ2-W	F81-TL-SQ	F81-TL-SQ2	SF81-SQ-W
Black Code	F81-SQ-B	F81-SQ2-B	-	-	SF81-SQ-B

Step 2: Choose Module Type

Model	- Type	- Trim/Body Colour	Reflector Colour	CCT	- Beam
M81	- T1	- W (White), B (Black)	W (White), HGB (High Gloss Black), B (Black), S (Silver), G (Gold)	3K	- 45D
M81	- T2	- W (White), B (Black)	B (Black)	3K	- 40D

Step 3: Select your Driver

	Dimmable	Dali	Casambi
M81-T1	DCC260-DX-12W	DCC180500-DD-1012W @ 260mA	DCC260700-CAS-1325W @ 260mA
M81-T2	DCC350-DX-20W	DCC260700-DD-1625W @ 350mA	DCC260700-CAS-1325W @ 350mA

Configuration Example: For a Trimless Single M81-T1 Dark Art Square Adjustable in Black with a High Gloss Black Reflector and a TRIAC Dimmable Driver, the following three components must be ordered. (1) Trimless Frame: F81-TL-SQ (2) Light Module: M81-T1-BHGB3K-45D (3) Dimmable Driver: DCC260-DX-12W.