


2 Core, Tinned Copper, Screened, Fire Alarm Cable

AS/NZS 5000.2:2006 450/750V V90

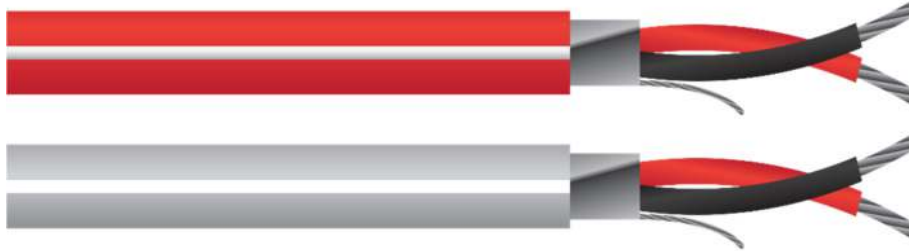

PRODUCT CODE	DESCRIPTION	PACKAGING
B2C0.75SCRFACGY200	2C 0.75mm TCW SCREENED FIRE ALARM CABLE - GREY	200m/500m Reel
B2C0.75SCRFACRD200	2C 0.75mm TCW SCREENED FIRE ALARM CABLE - RED	200m/500m Reel
B2C1.25SCRFACGY200	2C 1.25mm TCW SCREENED FIRE ALARM CABLE - GREY	200m/500m Reel
B2C1.25SCRFACRD200	2C 1.25mm TCW SCREENED FIRE ALARM CABLE - RED	200m/500m Reel

	0.75mm ²	1.25mm ²
Conductor	Tinned Oxygen Free Copper wire to AS1125 Ø = 24*020+0.005 mm*2	Tinned Oxygen Free Copper wire to AS1125 Ø = 16*032+0.005 mm*2
Insulation	V-90 PVC (AS/NZS 3808&RoHS) PVC Colour: Red, Black Ø = 2.45+0.05 mm*2	V-90 PVC (AS/NZS 3808 & RoHS) PVC Colour: Red, Black Ø = 2.70+0.05 mm*2
Screen/Shield	Aluminium Tape c/w 7*025mm TCW Drain Wire	Aluminium Tape c/w 7*025mm TCW Drain Wire
Outer Jacket:	5V-90 PVC (AS/NZS 3808 & RoHS) PVC Colour: Grey/ Red UV Stabilised Jacket thickness: 1.20+0.05mm Ø = 7.3+0.20mm	5V-90 PVC (AS/NZS 3808 & RoHS) PVC Colour: Grey/ Red UV Stabilised Jacket thickness: 1.20+0.05mm Ø = 7.9+0.20mm
Insulation Temp. Rating	-20°C to +90°C	-20°C to +90°C
Jacket Marking	MASER FIRE SOLUTIONS 2C 0.75mm ² TCW SCREENED FIRE ALARM CABLE AS/NZS 5000.2:2006 450/750V V90 DD/MM/YYYY 001M-200M	MASER FIRE SOLUTIONS 2C 1.25mm ² TCW SCREENED FIRE ALARM CABLE AS/NZS 5000.2:2006 450/750V V90 DD/MM/YYYY 001M-200M
Packaging	200m/500m Reel	200m/500m Reel



TDS#SCR FIRE ALARM 19062019_V2

Disclaimer: Although Maser Communications NZ Limited makes every reasonable effort to ensure their accuracy at the time of this publication, information and specifications described herein are subject to error or omission and to change without notice. Maser provides the information and specifications herein on an "AS IS" basis, with no representations or warranties, whether express, statutory or implied. In no event will Maser be liable for any damages (including consequential, indirect, incidental, special, punitive, or exemplary damages) whatsoever, even if Maser has been advised of the possibility of such damages, whether in an action under contract, negligence or any other theory, arising out of or in connection with the use, or inability to use, the information or specifications described herein.