


COB LED STRIP

GHR2505

30M LONG COB LED STRIP

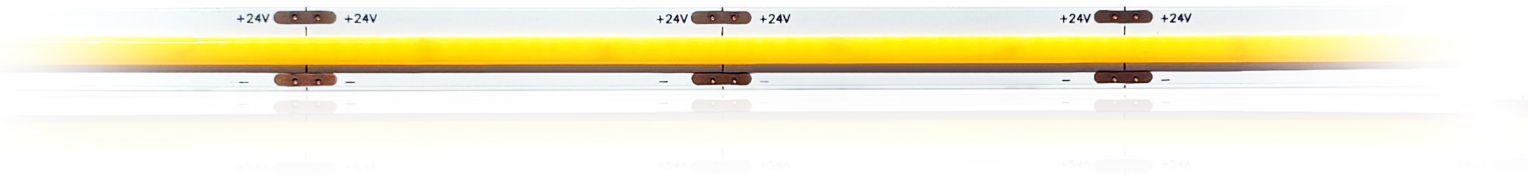


FEATURES

- High density for flawless appearance
- Connection length can be extended by certain LED drivers, controllers and repeaters
- Dimmable with compatible controller or dimmable LED driver
- 24V constant voltage LED driver required
- Heat-sink recommended
- Colour matching 5 MacAdam steps
- LED lifespan: 50000 hours @ L70, Ta 25°C
- Ta: -20°C to +40°C

OPTIONS


• QUICK CONNECT KIT:

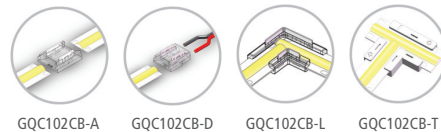

• EXTRUDED ALUMINIUM CHANNEL / HEAT-SINK:




DIMENSIONS

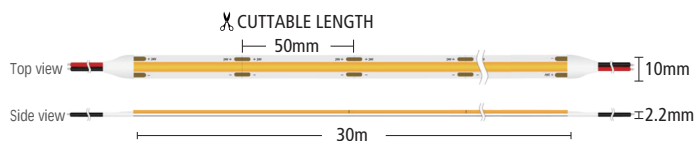

NOTE: 30m length with a single feed will have a slight voltage drop at the end of the strip.
It is recommended to have dual feeds for reduced voltage drop.

WIRING DIAGRAM

Power supply input for 2 ends

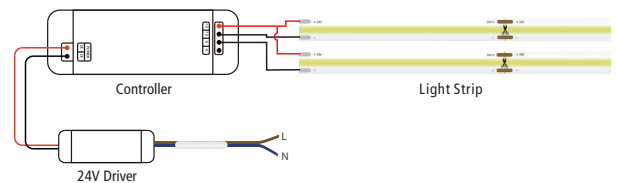

TECHNICAL SPECIFICATIONS

MODEL NO.	INPUT VOLTAGE (V)	POWER (W/m)	LUMEN (lm/m)	COLOUR TEMPERATURE (K)	CRI	R9	BEAM ANGLE (°)	LED QUANTITY
GHR2505 WW	24 (DC)	4.8	405	3000	>90	>50	180	420LEDs/m
GHR2505 CW			425	4000				
GHR2505 DL			425	6000				